

Beanstalk: A Decentralized Credit Based Stablecoin Protocol



Publius

beanstalk.publius@protonmail.com

bean.money

Published: August 6, 2021

Modified: April 11, 2022

Whitepaper Version: 1.16.0

Code Version: 1.16.0

“A national debt if it is not excessive will be to us a national blessing; it will be powerfull cement of our union.”

- Alexander Hamilton, Letter to Robert Morris, April 30, 1781¹

Abstract

Financial applications built on decentralized, permissionless computer networks, collectively referred to as Decentralized Finance (DeFi), often require a “stablecoin”: a network-native asset with stable value relative to an arbitrary value peg (e.g., 1 US Dollar (USD, \$), 100 Satoshis and 1oz of Gold). To date, flawed stablecoin implementations sacrifice the main benefits of decentralized computing by requiring trust in a centralized party and limit their potential market capitalization by imposing collateral requirements. A stablecoin that (1) does not compromise on decentralization, (2) does not require collateral, and (3) trends toward more liquidity and stability, will unlock the potential of DeFi. We propose an Ethereum²-native, credit based stablecoin protocol that issues an ERC-20 Standard³ token that fulfills these requirements. An on-chain price oracle leverages an existing centralized bridge between the Ethereum blockchain and the rest of the world to create a decentralized, reliable and inexpensive source for the price of a non-Ethereum-native value peg. A Decentralized Autonomous Organization (DAO) governed by a yield generating, inflationary, ERC-20 Standard token simultaneously provides security, encourages consistent liquidity growth, and dampens price volatility. Beanstalk uses a decentralized credit facility, variable supply and self-adjusting interest rate, to regularly cross the stablecoin price over its value peg without affecting users.

¹ founders.archives.gov/documents/Hamilton/01-02-02-1167

² ethereum.org

³ ethereum.org/en/developers/docs/standards/tokens/erc-20

Table of Contents

1	Introduction	4
2	Previous Work	5
3	Decentralized Price Oracle	5
4	The Bean Farm	7
5	Seasons	7
6	Silo	8
6.1	The Stalk System	8
6.2	Whitelist	8
6.3	Deposits, Withdrawals and Conversions	8
6.4	Calculating Stalk and Seeds	9
6.5	Governance	10
6.5.1	Participation	10
6.5.2	Voting Period	11
6.5.3	Pause	11
6.5.4	Beanstalk Improvement Proposals	11
6.5.5	Commit	12
7	Field	12
7.1	Soil	12
7.2	Pods	12
7.3	Weather	13
8	Peg Maintenance	13
8.1	Ideal Equilibrium	14
8.2	Bean Supply	14
8.3	Soil Supply	15
8.4	Weather	15
8.4.1	Debt Level	16
8.4.2	Position	16
8.4.3	Direction	17
8.4.4	Acceleration	17
8.4.5	Demand for Soil	18
8.4.6	Current State	19
8.4.7	Optimal State	19
8.4.8	Weather Changes	20
8.5	Sale on Uniswap	21

9	Economics	22
9.1	Ownership Concentration	22
9.2	Strong Credit	22
9.3	Marginal Rate of Substitution	22
9.4	Low Friction	23
9.5	Equilibrium	23
9.6	Incentives	23
10	Risk	24
11	Future Work	24
12	Appendix	26
12.1	Current Parameters	26
12.2	Whitelist	27
12.2.1	\emptyset	27
12.2.2	ϕ	27
12.2.3	BEAN:3CRV Curve LP Tokens (Φ)	27
12.2.4	BEAN:LUSD Curve LP Tokens (α)	28
12.3	Farmers Market	30
12.3.1	Pod Orders	30
12.3.2	Pod Listings	30
12.3.3	Clearance	30
12.3.4	Future Work	30
12.4	Fundraisers	32
12.5	Glossary	33
12.6	Whitepaper Version History	39

1 Introduction

Decentralized computer networks that run on open source, permissionless protocols (e.g., Bitcoin⁴ and Ethereum) present the next economic and technological frontiers: trustless goods and services. Instead of requiring users to trust a rent-seeking third party to write secure code, run it on secure computer servers and perform fair system administration, trustless technology brings control back to users. Anyone can verify the security, authenticity and policies of open source software for themselves. Any computer with an internet connection can use, and participate in maintenance of, permissionless networks. Protocol-native financial incentives encourage participation in network maintenance. A diverse set of network maintenance participants creates decentralization. Decentralization and permissionlessness create censorship resistance, which is fundamental to trustlessness. Potential applications built on top of well designed trustless networks are infinite.

A key promise of decentralized, permissionless computer networks is the widespread availability of financial tools without the need for trust-providing, rent-seeking central authorities. However, as blockchains that support decentralized networks are adopted, the fiat-denominated values of their native assets (e.g., Bitcoin and Ether (ETH)) change radically. To date, the practicality of using DeFi technologies is limited by the lack of a decentralized, rent-free, low-volatility blockchain-native asset.

A stablecoin protocol generates a blockchain-native asset and attempts to keep its price stable relative to an arbitrary value peg. Stablecoin utility is a function of censorship resistance, liquidity and stability. Current implementations fail to deliver a stablecoin that is (1) decentralized, (2) without collateral requirements, and (3) stable relative to its value peg.

First generation stablecoins (e.g., US Dollar Coin⁵ (USDC), Tether⁶ and Wrapped Bitcoin⁷) claim to be 100% collateralized and require a centralized custodian. First generation stablecoins that offer convertibility function as strong bridges between their respective networks and the rest of the world. Arbitrage opportunities created by convertibility ensure the price of the on-chain asset closely tracks the custodied value peg. However, first generation stablecoins sacrifice decentralization entirely: centralized organizations custody the off-chain assets and can freeze the on-chain assets unilaterally.

Second generation stablecoins (e.g., Dai⁸) use on-chain collateral to remove most points of centralization but by necessity introduce rent payments to help keep their price equal to their value peg. The combination of collateral requirements and rent payments significantly limits the potential market capitalizations of these stablecoins.

Despite the shortcomings of current stablecoin implementations, demand for USD stablecoins continues to increase rapidly. Over the past twelve months, the total market capitalization of USD stablecoins has increased more than 500% to over \$100 Billion.⁹ Despite this rapid increase in supply, the borrowing rates on USD stablecoins remain high,¹⁰ indicating excess demand. Supply cannot meet market demand because of collateral requirements.

A new set of protocols have attempted to create a third generation stablecoin without collateral requirements. In general, these protocols adjust themselves mechanically to return the price of their stablecoin to their value peg. To date, implementations of third generation stablecoins have failed to regularly cross their price over their value peg due to poorly designed peg maintenance mechanisms.

⁴ bitcoin.org

⁵ circle.com/usdc

⁶ tether.to

⁷ wbtc.network

⁸ makerdao.com

⁹ stablecoinindex.com/marketcap

¹⁰ app.aave.com/markets

Beanstalk uses a dynamic peg maintenance mechanism to regularly cross the price of 1 Bean (\mathbb{B}) – the Beanstalk ERC-20 Standard stablecoin – over its value peg without centralization or collateral requirements. Regularly crossing the price of $\mathbb{B}1$ over its value peg creates the opportunity to regularly buy and sell Beans at its value peg. It is impossible to keep a stablecoin price equal to its value peg without convertibility; convertibility inherently introduces a centralized custodian for off-chain assets. Instead of holding a perfect peg, Beanstalk creates user confidence by consistently crossing the price of $\mathbb{B}1$ over its value peg with increased frequency and less volatility.

Beanstalk consists of three interconnected components: (1) a decentralized price oracle, (2) a decentralized governance mechanism, and (3) a decentralized credit facility. Beanstalk-native financial incentives coordinate the components to regularly cross the price of $\mathbb{B}1$ over its value peg during both long run decreases and increases in demand for Beans in a cost-efficient and decentralized fashion.

Beanstalk is designed from economic first principles to create a censorship resistant stablecoin. Over time, censorship resistance, liquidity and stability increase. The following principles inspire Beanstalk:

- Low concentration of ownership;
- Strong credit;
- The marginal rate of substitution;
- Low friction;
- Equilibrium; and
- Incentive structures determine behaviors of financially motivated actors.

2 Previous Work

Beanstalk is the culmination of previous development, evolution and experimentation within the DeFi ecosystem.

A robust trustless computer network that supports fungible token standards like Ethereum with a network-native decentralized exchange like Uniswap¹¹ is required to implement a decentralized stablecoin.

First generation stablecoins that offer convertibility reliably bridge the value of non-Ethereum-native assets to the Ethereum blockchain. Beanstalk leverages the existence of a centralized convertible stablecoin that trades on Uniswap to create a new decentralized stablecoin with a non-Ethereum-native value peg.

Beanstalk is inspired by Empty Set Dollar.¹² The failures of Empty Set Dollar and similar stablecoin implementations provided invaluable information that influenced the design of Beanstalk.

3 Decentralized Price Oracle

One problem native to decentralized stablecoin protocols is the need to be aware of a price without trusting a third-party to provide it. An oracle delivers external information to smart contracts. A robust decentralized stablecoin requires a tamper-proof, manipulation resistant and decentralized price oracle.

¹¹ uniswap.org

¹² emptyset.finance

When a price source is not on the blockchain, decentralized price oracles are complicated to build, expensive to maintain and often inaccurate. Beanstalk leverages Uniswap, an on-chain decentralized exchange, and a centralized convertible stablecoin to remove these complications, costs and inaccuracies entirely.

Uniswap is an Ethereum-native decentralized exchange protocol that allows anyone to create new trading pairs between any two ERC-20 Standard tokens. Uniswap always offers a price on any size trade, at any time, for a 0.3% trading fee. Uniswap allows continuous trading in either direction by maintaining a liquidity pool of both currencies. The current price is the ratio of the two assets in the pool. Owners of both currencies can add liquidity to the pool in exchange for Uniswap liquidity pool tokens (LP tokens) unique to that liquidity pool. LP token owners receive a portion of trading fees. Price slippage is proportional to the size of a trade relative to the size of the liquidity pool. Uniswap pairs with larger liquidity pools serve as more robust price sources.

The initial oracle measures the USD price of \$1 by using two Uniswap v2 liquidity pools as price sources: (1) the USDC:ETH Uniswap v2 liquidity pool, which consistently has over \$100 Million in liquidity,¹³ and (2) a new ϕ :ETH Uniswap v2 liquidity pool. Arbitrage opportunities between the USDC:ETH Uniswap pool and other exchanges ensure the pool serves as an accurate price source for USDC. Arbitrage opportunities provided by the convertibility offered between USDC and US Dollars ensure the value of 1 USDC closely tracks the value of \$1. Therefore, Beanstalk considers the price of ϕ 1 equal to \$1 when the ratios of the USDC:ETH and ϕ :ETH pools are identical. The centralized organizations that control USDC cannot blacklist the USDC:ETH Uniswap pool without destroying the value proposition of USDC.

In general, Beanstalk can deploy a Bean with a value peg (V) for ϕ 1 equal to any asset (e.g., \$1) with an existing ERC-20 Standard first generation stablecoin (X) (e.g., USDC) that offers convertibility to V and trades on Uniswap. Beanstalk uses two Uniswap liquidity pools as price sources to construct a decentralized price oracle: (1) an existing Uniswap liquidity pool ($X:Y$) (e.g., USDC:ETH) that consists of X and a decentralized ERC-20 Standard token (Y) (e.g., ETH¹⁴), and (2) a new Uniswap liquidity pool ($\phi:Y$) that consists of Beans and Y . The combination of arbitrage opportunities between Uniswap and other exchanges, and between X and V , ensures the $X:Y$ Uniswap price mirrors the exchange rate between V and Y . Beanstalk considers the price of ϕ 1 equal to its value peg when the ratios of $X:Y$ and $\phi:Y$ are equal.

Decentralized systems are never administered by or dependent on a single individual or centralized organization. Beanstalk can leverage an arbitrary X without exposure to malicious actions from its centralized operators (e.g., censorship) by maintaining an identical ratio of $X:Y$ and $\phi:Y$.

To increase the cost of oracle manipulation, instead of using the last traded price or current price, the Beanstalk price oracle calculates a time weighted average price¹⁵ (TWAP) for each pair ($\bar{P}^{X:Y}$ and $\bar{P}^{\phi:Y}$), such that $\bar{P}^{X:Y}, \bar{P}^{\phi:Y} \in \{j \times 10^{-6} \mid j \in \mathbb{Z}^+\}$, by averaging the last traded price in each Ethereum block over a predefined time interval.

We define the oracle price of ϕ 1 (\bar{P}), such that $\bar{P} \in \{j \times 10^{-6} \mid j \in \mathbb{Z}^+\}$, for a given $\bar{P}^{X:Y}$ and $\bar{P}^{\phi:Y}$ as:

$$\bar{P} = \frac{\bar{P}^{\phi:Y}}{\bar{P}^{X:Y}}$$

When $\bar{P} = 1$, the TWAP of ϕ 1 was equivalent to V over the time interval. Thus, Beanstalk constructs a robust cost-efficient decentralized price oracle for a non-Ethereum-native value peg.

¹³ v2.info.uniswap.org/pair/0xb4e16d0168e52d35cadd2c6185b44281ec28c9dc

¹⁴ weth.io

¹⁵ uniswap.org/docs/v2/core-concepts/oracles

4 The Bean Farm

Well designed decentralized protocols create utility for end users without requiring, but never limiting, participation in protocol maintenance. Protocol-native financial incentives encourage performance of work that creates utility for end users. Low barriers to and variety in work enable a diverse set of participants. A diverse set of well incentivized workers creates censorship resistant utility.

Beanstalk does not require actions from, impose rent on, or affect in any way, regular Bean users (e.g., smart contracts). Anyone can join the *Bean Farm* and profit from participation in protocol maintenance. Governance of Beanstalk upgrades and Bean peg maintenance take place on the *Bean Farm*.

The *Bean Farm* has two components: the *Silo* and *Field*. Beanstalk-native financial incentives coordinate the two components to create a stalwart system of governance, consistently grow Bean liquidity and regularly cross the price of $\emptyset 1$ over its value peg.

The *Silo* – the Beanstalk DAO – offers passive yield opportunities to owners of Bean and other whitelisted assets (λ) for participation in governance of Beanstalk upgrades. Anyone can become a *Silo Member* by *Depositing* λ into the *Silo* to earn *Stalk*. *Stalk* owners govern Beanstalk upgrades and are rewarded with Beans when the Bean supply increases.

The *Field* – the Beanstalk credit facility – offers yield opportunities to *Bean Farmers* (creditors) for participation in peg maintenance. Anyone can become a *Bean Farmer* by lending Beans that are not in the *Silo* to Beanstalk. Bean loans are repaid to *Bean Farmers* with interest when the Bean supply increases.

Time on the *Bean Farm* is kept in *Seasons*.

5 Seasons

The Beanstalk governance and peg maintenance mechanisms require a protocol-native timekeeping mechanism and regular code execution on the Ethereum blockchain. Beanstalk uses *Seasons* to create a cost-efficient protocol-native timekeeping mechanism and to ensure cost-efficient code execution on Ethereum at regular intervals. In general, Beanstalk uses Ethereum block timestamps (E) such that $E \in \mathbb{Z}^+$.

We define a *Season* (t), such that $t \in \mathbb{Z}^+$, as an approximately 3,600 second (1 Hour) interval. The first *Season* begins when Beanstalk is deployed. Every subsequent *Season* begins when the `sunrise()` function is called manually on the blockchain. When Beanstalk accepts the `sunrise()` function, the necessary code is executed.

The `sunrise()` function is called by sending a transaction on the Ethereum blockchain that includes a `sunrise()` function call. Beanstalk only accepts one `sunrise()` function call per *Season*. Beanstalk accepts the first `sunrise()` function call provided that the timestamp in the Ethereum block containing it is sufficiently distant from the timestamp in the Ethereum block containing the Beanstalk deployment (E_0).

The minimum timestamp Beanstalk accepts a `sunrise()` function call for a given t (E_t^{\min}), such that $1 < t$, and E_0 is:

$$E_t^{\min} = 3600 \left(\left\lfloor \frac{E_0}{3600} \right\rfloor + t \right)$$

The cost to execute the code changes depending on the traffic on the Ethereum network and the state of Beanstalk. Beanstalk covers the transaction cost by awarding the sender of an accepted `sunrise()` function call with newly minted Beans. To encourage regular `sunrise()` function calls even during periods of congestion on the Ethereum network while minimizing cost, the award starts at 100 Beans and compounds 1% every additional second that elapses past E_t^{\min} for 300 seconds.

The award for successfully calling the `sunrise()` function for t (a_t), such that $a_t \in \{j \times 10^{-6} \mid j \in \mathbb{Z}^+\}$ and $1 < t$, in a block with a given timestamp (E_t) is:

$$a_t = 100 \times 1.01^{\min\{E_t - E_t^{\min}, 300\}}$$

To minimize the cost of calculating a_t , Beanstalk uses a binomial estimation with a margin of error of less than 0.05%. Thus, Beanstalk creates a cost-efficient protocol-native timekeeping mechanism and ensures cost-efficient code execution on the Ethereum blockchain at regular intervals.

6 Silo

Beanstalk requires the ability to coordinate protocol upgrades. The *Silo* – the Beanstalk DAO – uses the *Stalk System* to create protocol-native financial incentives that coordinate Beanstalk upgrades and consistently improve security, liquidity and stability. *Silo Members* earn passive yield from participation in governance of Beanstalk upgrades.

6.1 The Stalk System

The *Stalk System* improves decentralization over time and creates Beanstalk-native financial incentives to leave assets *Deposited* in the *Silo* and allocate value in ways that benefit Beanstalk.

Anyone can become a *Silo Member* by *Depositing* whitelisted assets into the *Silo* to earn *Stalk* and *Seeds*. *Stalk* is an ERC-20 Standard token. *Seeds* are not liquid. Every *Season*, 1×10^{-4} additional *Stalk* grows from each *Seed*. *Silo Membership* is proportional to *Stalk* ownership relative to total outstanding *Stalk*.

Silo Members are entitled to participate in Beanstalk governance and a portion of Bean mints. The influence in governance of, and distribution of Beans paid to, a *Silo Member* are proportional to their *Silo Membership*. *Silo Membership* becomes less concentrated over time.

6.2 Whitelist

Any ERC-20 Standard token can be added to or removed from the *Silo Whitelist* (Λ), via Beanstalk governance (see Section 5.5). \emptyset is always on the *Whitelist* (i.e., $\emptyset \in \Lambda$).

In order for a given λ to be added to the *Whitelist*, Beanstalk requires (1) its token address, (2) a function to calculate the flash-loan-resistant Bean-denominated-value (BDV) for a given number of λ , ($g^\lambda(z^\lambda)$) where z^λ is the number of λ in a *Deposit*, (3) the number of *Stalk* per BDV of λ *Deposited* (k^λ), and (4) the number of *Seeds* per BDV of λ *Deposited* (c^λ), such that $z^\lambda, k^\lambda, c^\lambda \in \{j \times 10^{-18} \mid j \in \mathbb{Z}^+\}$, to be stored.

6.3 Deposits, Withdrawals and Conversions

λ can be *Deposited* into and *Withdrawn* from the *Silo* at any time, or *Converted* within the *Silo* in specific instances. Assets are *Frozen* for ξ , such that $\xi \in \mathbb{N}$, full *Seasons*¹⁶ upon *Withdrawal*.

¹⁶ github.com/BeanstalkFarms/Beanstalk/blob/master/bips/bip-9.md

Beanstalk rewards *Stalk* and *Seeds* to *Depositors* immediately upon *Depositing* λ into the *Silo* based on the asset *Deposited*, its BDV when *Deposited*, k^λ and c^λ .

The number of *Stalk*, *Seeds*, and *Stalk* from *Seeds* rewarded for a *Deposited* asset must be forfeited upon its *Withdrawal* from the *Silo*.

Deposited ϕ can be *Converted* to *Deposited* LP Tokens for the $\phi:Y$ Uniswap v2 liquidity pool (ϕ), such that $\phi \in \{j \times 10^{-18} \mid j \in \mathbb{Z}^+\}$, $\phi \in \Lambda$, (1) at anytime, by contributing additional Y (e.g., ETH) to the $\phi:Y$ Uniswap v2 liquidity pool, or (2) when the price of ϕ 1 is above its value peg without contributing additional Y . *Deposited* ϕ can be *Converted* to *Deposited* ϕ when the price of ϕ 1 is below its value peg.

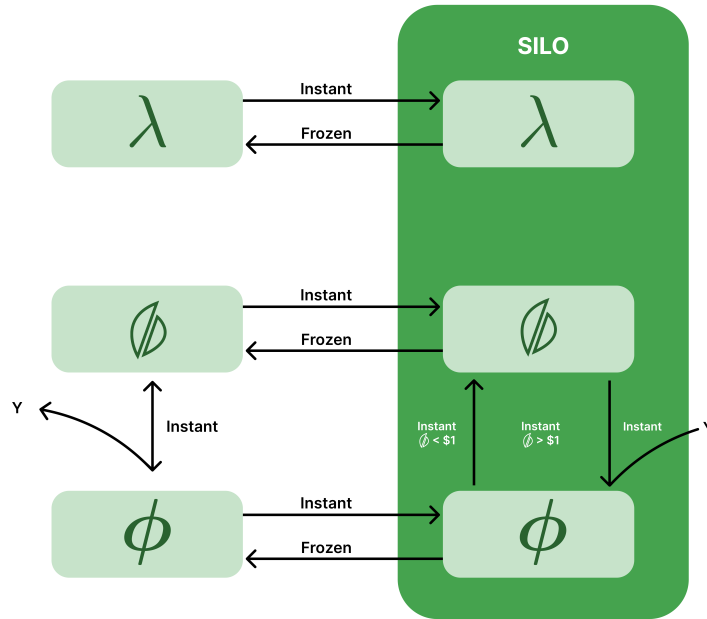


Figure 1: Silo

6.4 Calculating Stalk and Seeds

A *Silo Member's* total *Stalk* is the sum of the *Stalk* for each of their *Deposits* and *Farmable* ϕ (f^ϕ), such that $f^\phi \in \{j \times 10^{-6} \mid j \in \mathbb{N}\}$. *Farmable* ϕ are Beans paid to a *Silo Member* after the last *Season* the *Silo Member* interacted with the *Silo* (t_f).^{17,18} *Farmable* ϕ automatically earn *Stalk*. The next *Season* the *Silo Member* interacts with the *Silo* (*Deposit*, *Withdraw*, *Convert*, or *Farm*) *Farmable* ϕ are automatically *Deposited* and receive *Seeds*.

The *Stalk* for a given *Deposit* are determined by its duration of *Deposit*, asset type, BDV when *Deposited*, k^λ , c^λ and t_f .

When a *Silo Member Deposits* λ , they log the number of λ *Deposited* and its BDV when *Deposited* (l), such that $l \in \{j \times 10^{-18} \mid j \in \mathbb{Z}^+\}$, where $l = g^\lambda(z^\lambda)$, (i.e., (z^λ, l)). Beanstalk stores a map of each *Silo Member's* *Deposits* that are still in the *Silo*, from *Silo Member* to token address to *Season* to *Deposit*, where Z_i^λ represents a *Silo Member's* set of λ *Deposits* during *Season* i .

¹⁷ github.com/BeanstalkFarms/Beanstalk/blob/master/bips/bip-0.md

¹⁸ snapshot.org/#/beanstalkfarms.eth/proposal/Beanstalk_Pause_Proposal-0_Next_Steps

The *Stalk* during t for a given Z_i^λ of a *Silo Member* that last updated their *Silo* in t_f (K_t^λ), such that $K_t^\lambda \in \{j \times 10^{-10} \mid j \in \mathbb{N}\}$, is:

$$K_t^\lambda = \sum_{i=1}^{t_f} \sum_{z^\lambda \in Z_i^\lambda} l \left(1 + \frac{c^\lambda(t_f - i)}{10000} \right)$$

A *Silo Member's* total *Stalk* during t (K_t), such that $K_t \in \{j \times 10^{-10} \mid j \in \mathbb{Z}^+\}$, is:

$$K_t = \sum_{\lambda \in \Lambda} K_t^\lambda + f^\emptyset$$

The *Seeds* for a given *Deposit* are determined by its duration of *Deposit*, asset type, BDV when *Deposited*, c^λ and t_f .

The *Seeds* during t for a given Z_i^λ of a *Silo Member* that last updated their *Silo* in t_f (c_t^λ), such that $c_t^\lambda \in \{j \times 10^{-6} \mid j \in \mathbb{N}\}$, is:

$$C_t^\lambda = \sum_{i=1}^{t_f} \sum_{z^\lambda \in Z_i^\lambda} c^\lambda l$$

A *Silo Member's* total *Seeds* during t (C_t), such that $C_t \in \{j \times 10^{-6} \mid j \in \mathbb{N}\}$, is:

$$C_t = \sum_{\lambda \in \Lambda} C_t^\lambda$$

When a *Silo Member Withdraws* λ , they must forfeit the number of *Stalk*, *Seeds*, and *Stalk* from *Seeds* rewarded to the assets being *Withdrawn* and update the map accordingly.

When a *Silo Member Converts* a \emptyset *Deposit* to a ϕ *Deposit*, they update its *Season of Deposit* to retain its grown *Stalk* from *Seeds*. A maximum of 0.04% of *Stalk* for a *Converted* \emptyset *Deposit* is forfeited due to rounding.

When a *Silo Member Converts* a ϕ *Deposit* to a \emptyset *Deposit*, they update its *Season of Deposit* to retain its grown *Stalk* from *Seeds*. The number of *Stalk* and *Seeds* rewarded or forfeited for a *Converted* ϕ *Deposit* is dependent on the change in its BDV between when it was *Deposited* and *Converted*.

6.5 Governance

A robust decentralized governance mechanism must balance the principles of decentralization with resistance to attempted protocol changes, both malicious and ignorant, and the ability to quickly adapt to changing information. In practice, Beanstalk must balance ensuring sufficient time for all ecosystem participants to consider a *Beanstalk Improvement Proposal (BIP)*, join the *Silo* and cast their votes, with the ability to be quickly upgraded in cases of emergency.

6.5.1 Participation

Any Bean or λ owner can become a *Silo Member* and participate in Beanstalk governance by *Depositing* \emptyset or λ into the *Silo* to earn *Stalk*.

Beanstalk only accepts votes in favor of *BIPs*. A *Silo Member's* vote is counted in proportion to their *Stalk*.

Any *Silo Member* that owns more than K^{\min} , such that $K^{\min} \in \{j \times 10^{-6} \mid j \in \mathbb{N}, j \leq 10^6\}$, of total outstanding *Stalk* can submit a *BIP*. In the future, as the ownership concentration of *Stalk* decreases, we expect a *BIP* to lower this threshold.

The award for submitting a *BIP* that gets accepted (a^{BIP}), such that $a^{\text{BIP}} \in \{j \times 10^{-6} \mid j \in \mathbb{N}\}$, is determined by the submitter of the *BIP*. If a^{BIP} is excessively high such that a *BIP* that would otherwise be acceptable to the community is voted down because of the award, the open source nature of Beanstalk allows someone else to re-submit an identical *BIP* with a more reasonable a^{BIP} .

The submitter of a *BIP* automatically votes in favor of the *BIP*, cannot rescind their vote, and cannot have less than K^{min} of total outstanding *Stalk* after an interaction with the *Silo*, until the end of the *Voting Period*.

6.5.2 Voting Period

A *Voting Period* opens when a *BIP* is submitted to the Ethereum blockchain and ends at the beginning of the 169th *Season* after it is submitted, or when it is committed with a supermajority.

If at the end of the *Voting Period*:

- Less than or equal to half of the total outstanding *Stalk* votes in favor of the *BIP*, it fails; or
- More than half of the total outstanding *Stalk* votes in favor of the *BIP*, it passes.

If at any time 24 hours or more after the beginning and before the end of the *Voting Period* more than two-thirds of the total outstanding *Stalk* votes in favor of the *BIP*, it can be committed to the Ethereum blockchain.

6.5.3 Pause

In case of a particularly dangerous vulnerability to Beanstalk, the *Silo* can *Pause* or *Unpause* Beanstalk by a two-thirds supermajority vote at any time or as part of a normal *BIP*. When *Paused*, Beanstalk does not accept a `sunrise()` function call. When *Unpaused*, the `sunrise()` function can be called at the beginning of the next hour.

For a given timestamp of last *Unpause* (E_Ψ) during *Season* t' , we define $E_t^{\text{min}} \vee E_t^{\text{min}}$ such that $t' < t$ as:

$$E_t^{\text{min}} = 3600 \left(\left\lfloor \frac{E_\Psi}{3600} \right\rfloor + t - t' \right)$$

$\bar{P} = 1$ for each *Season* that contains a *Pause* and *Unpause*.

6.5.4 Beanstalk Improvement Proposals

Beanstalk implements EIP-2535.¹⁹ Beanstalk is a diamond with multiple facets. Beanstalk supports multiple simultaneous *BIPs* with independent *Voting Periods*.

A *BIP* has four inputs: (1) Beanstalk should *Pause* or *Unpause*, (2) a list of facets and functions to add or remove upon commit, (3) a function to run upon commit, and (4) the Ethereum address of the contract holding the function to run upon commit.

If inputs 2, 3 and 4 are empty, a *BIP* can pass with a two-thirds supermajority vote at any time before the end of the *Voting Period*.

¹⁹ eips.ethereum.org/EIPS/eip-2535

At launch, the deployment address has the unilateral ability to *Pause* or *Unpause* Beanstalk, and commit a *BIP*. In the future, we expect a *BIP* will revoke these abilities from the deployment address.

6.5.5 Commit

When a *BIP* passes or has a two-thirds majority, it must be manually committed to the Ethereum blockchain. To encourage prompt commitment of *BIPs* even during periods of congestion on the Ethereum network while minimizing cost, the award for successful commitment starts at 100 Beans and compounds 1% every additional six seconds that elapse past the end of its *Voting Period* (E_{BIP}) for 1,800 seconds.

The award for successfully committing an approved *BIP* (a^q), such that $a^q \in \{j \times 10^{-6} \mid j \in \mathbb{Z}^+\}$, with a given timestamp of commitment (E_q) and E_{BIP} is:

$$a^q = 100 \times 1.01^{\min\{\lfloor \frac{E_q - E_{BIP}}{6} \rfloor, 300\}}$$

To minimize the cost of calculating a^q , Beanstalk uses a binomial estimation with a margin of error of less than 0.05%. When a *BIP* is committed with a two-thirds supermajority before the end of its *Voting Period*, $a^q = 100$.

Thus, Beanstalk creates a robust decentralized governance mechanism and consistently improves security, liquidity and stability.

7 Field

The *Field* is the Beanstalk credit facility.

Anytime there is *Soil* (defined below) in the *Field*, any owner of Beans that are not in the *Silo* can *Sow* (lend) Beans to Beanstalk in exchange for *Pods* (defined below) and become a *Bean Farmer*. The *Weather* is the interest rate on Bean loans.

7.1 Soil

We define *Soil* (S), such that $S \in \{j \times 10^{-6} \mid j \in \mathbb{N}\}$, as the current number of Beans that can be *Sown* in exchange for *Pods*. $\emptyset 1$ is *Sown* in one *Soil*. Any time there is *Soil* in the *Field* (i.e., $0 < S$), Beans can be *Sown* into *Soil*. Beanstalk permanently removes *Sown* \emptyset from the Bean supply.

When Beanstalk is willing to remove more Beans from the Bean supply, it creates more *Soil*. Beanstalk sets the *Soil* supply at the beginning of each *Season* according to the peg maintenance mechanism.²⁰

7.2 Pods

Pods are the debt asset of Beanstalk. Beanstalk never defaults on debt: *Pods* automatically grow from *Sown* \emptyset and never expire.

²⁰ github.com/BeanstalkFarms/Beanstalk/blob/master/bips/bip-6.md

In the future, when the TWAP of $\emptyset 1$ is above its value peg over a *Season*, *Pods* ripen and become *Harvestable* (redeemable) for $\emptyset 1$ at anytime. *Pods* ripen on a first in, first out (FIFO) basis: Beans that are *Sown* first ripen into *Harvestable Pods* first. *Bean Farmers* can *Harvest* their ripened *Pods* anytime by submitting a `harvest()` function call to the blockchain. There is no penalty for waiting to *Harvest Pods*.

Pods are transferable. In practice, *Pods* are non-callable bonds with priority for payment represented as a place in line. The number of *Pods* that grow from *Sown* \emptyset is determined by the *Weather*.

7.3 Weather

We define the *Weather* (w), such that $w \in \mathbb{Z}^+$, as the percentage of additional Beans ultimately *Harvested* from 1 *Sown* \emptyset .

The number of *Pods* (d) that grow from a given number of *Sown* \emptyset (u), such that $d, u \in \{j \times 10^{-6} \mid j \in \mathbb{Z}^+\}$, and w is:

$$d = u \times \left(1 + \frac{w}{100}\right)$$

The *Weather* is constant each *Season*. *Beanstalk* changes the *Weather* at the beginning of each *Season* according to the peg maintenance mechanism.

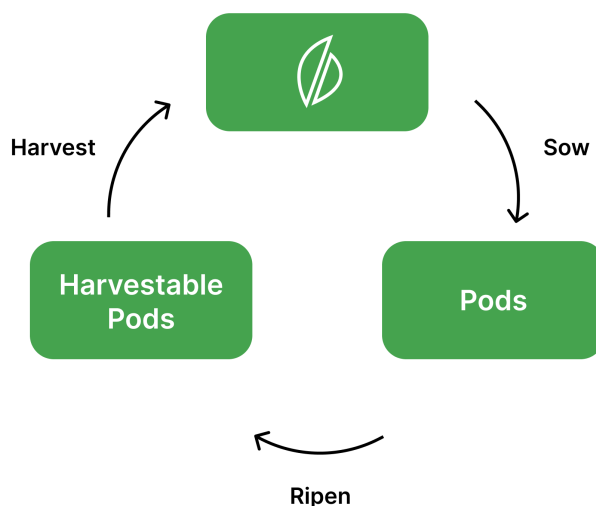


Figure 2: Field

8 Peg Maintenance

Beanstalk faces the fundamental limitation that it cannot fix the price of $\emptyset 1$ at its value peg, but instead must encourage widespread participation in peg maintenance through protocol-native financial incentives. Stability is a function of how frequently and regularly the price of $\emptyset 1$ crosses, and the magnitudes of price deviations from, its value peg. *Beanstalk* regularly crosses the price of $\emptyset 1$ over its value peg during both long run decreases and increases in demand for Beans.

Beanstalk has four optional peg maintenance tools available: (1) increase the Bean supply, (2) change the *Soil* supply, (3) change the *Weather*, and (4) sell Beans on Uniswap. At the beginning of every *Season*, *Beanstalk* evaluates its position (*i.e.*, price and debt level) and current state (*i.e.*, direction and acceleration) with respect to ideal equilibrium (defined below), and dynamically adjusts the Bean supply, *Soil* supply and *Weather* to move closer to ideal equilibrium.

8.1 Ideal Equilibrium

Beanstalk is credit based. Beanstalk only fails if it can no longer attract creditors. A reasonable level of debt attracts creditors. Therefore, in addition to the Bean price, the peg maintenance mechanism considers the Beanstalk debt level (defined below).

Beanstalk is in ideal equilibrium when the Bean price and the Beanstalk debt level are both stable at their optimal levels. In practice, this requires that three conditions are met: (1) the price of $\emptyset 1$ is regularly oscillating over its value peg, (2) the Beanstalk debt level is optimal (defined below), and (3) demand for *Soil* is steady (defined below).

Beanstalk affects the supply of and demand for Beans to return to ideal equilibrium in response to the Bean price, the Beanstalk debt level and changing demand for *Soil* by adjusting the Bean supply, *Soil* supply and *Weather*. Bean supply increases and *Soil* supply changes primarily affect Bean supply. *Weather* changes primarily affect demand for Beans. In order to make the proper adjustments, Beanstalk closely monitors the states of both the Bean and *Soil* markets.

In practice, maintaining ideal equilibrium is impossible. Deviations from ideal equilibrium along one or both axes are normal and expected. As Beanstalk grows, the durations and magnitudes of deviations decrease.

8.2 Bean Supply

At the beginning of each *Season*, in addition to the award for successfully calling the `sunrise()` function, Beanstalk increases the Bean supply based on (1) the time weighted average shortage of Beans in the $\emptyset:Y$ liquidity pool over the previous *Season*, and (2) the ϕ in the *Silo* as a percent of total ϕ (ϕ^{Silo}), such that $\phi^{\text{Silo}} \in \{j \times 10^{-6} \mid j \in \mathbb{N}, j \leq 10^6\}$, at the end of the previous *Season*. Half the additional Bean supply increase is used to pay off debt and the other half is distributed to *Stalk* owners.

At the beginning of t , Beanstalk calculates the TWAP over the previous *Season* of each pool ($\bar{P}_{t-1}^{X:Y}$, $\bar{P}_{t-1}^{\emptyset:Y}$), and $\emptyset 1$ (\bar{P}_{t-1}), and a liquidity and time weighted average shortage or excess of Beans in the $\emptyset:Y$ liquidity pool over the previous *Season* ($\Delta \bar{b}_{t-1}$), such that $\Delta \bar{b}_{t-1} \in \{j \times 10^{-6} \mid j \in \mathbb{Z}\}$.

If $1 < \bar{P}_{t-1}$, there was a liquidity and time weighted average shortage of Beans in the pool over the previous *Season* (i.e., $0 < \Delta \bar{b}_{t-1}$). If $\bar{P}_{t-1} < 1$, there was a liquidity and time weighted average excess of Beans in the pool over the previous *Season* (i.e., $\Delta \bar{b}_{t-1} < 0$). If $\bar{P}_{t-1} = 1$, there was neither a liquidity and time weighted excess nor a shortage of Beans in the pool over the previous *Season*.

$\Delta \bar{b}_{t-1}$ is computed from the difference between the liquidity and time weighted average optimal number of Beans in the $\emptyset:Y$ liquidity pool over the previous *Season* (\bar{b}_{t-1}^*) and the liquidity and time weighted average number of Beans in the $\emptyset:Y$ liquidity pool over the previous *Season* (\bar{b}_{t-1}), such that $\bar{b}_{t-1}^*, \bar{b}_{t-1} \in \{j \times 10^{-6} \mid j \in \mathbb{Z}^+\}$.

We define \bar{b}_{t-1}^* for a given $\bar{P}_{t-1}^{X:Y}$, number of \emptyset in the $\emptyset:Y$ liquidity pool at the end of the previous *Season* (b_{t-1}), such that $b_{t-1} \in \{j \times 10^{-6} \mid j \in \mathbb{Z}^+\}$, number of Y in the $\emptyset:Y$ liquidity pool at the end of the previous *Season* (y_{t-1}), such that $y_{t-1} \in \{j \times 10^{-18} \mid j \in \mathbb{Z}^+\}$, and ϕ^{Silo} as:

$$\bar{b}_{t-1}^* = \sqrt{\frac{b_{t-1} \times y_{t-1} \times \phi^{\text{Silo}}}{\bar{P}_{t-1}^{X:Y}}}$$

We define \bar{b}_{t-1} for a given $\bar{P}_{t-1}^{\phi:Y}$, b_{t-1} , y_{t-1} , and ϕ^{Silo} as:

$$\bar{b}_{t-1} = \sqrt{\frac{b_{t-1} \times y_{t-1} \times \phi^{\text{Silo}}}{\bar{P}_{t-1}^{\phi:Y}}}$$

Therefore, we define $\Delta\bar{b}_{t-1}$ for a given \bar{b}_{t-1}^* and \bar{b}_{t-1} as:

$$\Delta\bar{b}_{t-1} = \bar{b}_{t-1}^* - \bar{b}_{t-1}$$

At the beginning of each Season, Beanstalk mints m_t Beans, such that $m_t \in \{j \times 10^{-6} \mid j \in \mathbb{Z}^+\}$. We define m_t for a given a_t and $\Delta\bar{b}_{t-1}$ as:

$$m_t = a_t + \max(0, \Delta\bar{b}_{t-1})$$

The distribution of $\Delta\bar{b}_{t-1}$ is dependent on the total number of *Unharvestable Pods* (D), such that $D \in \{j \times 10^{-6} \mid j \in \mathbb{N}\}$, and $\Delta\bar{b}_{t-1}$. If $\frac{1}{2}\Delta\bar{b}_{t-1} < D$ (i.e., there are more *Unharvestable Pods* than $\frac{1}{2}\Delta\bar{b}_{t-1}$), $\frac{1}{2}\Delta\bar{b}_{t-1}$ *Pods* ripen and become *Harvestable* and $\frac{1}{2}\Delta\bar{b}_{t-1}$ newly minted Beans are distributed to *Stalk* owners. If $D < \frac{1}{2}\Delta\bar{b}_{t-1}$ (i.e., there are less *Unharvestable Pods* than $\frac{1}{2}\Delta\bar{b}_{t-1}$), D *Pods* ripen and become *Harvestable* and $\Delta\bar{b}_{t-1} - D$ newly minted Beans are distributed to *Stalk* owners.

Therefore, the number of *Pods* that ripen and become *Harvestable* at the beginning of each Season (h_t), such that $h_t \in \{j \times 10^{-6} \mid j \in \mathbb{N}\}$, is:

$$h_t = \min\left(\max\left(0, \frac{1}{2}\Delta\bar{b}_{t-1}\right), D\right)$$

8.3 Soil Supply

At the beginning of each Season Beanstalk sets the *Soil* supply. When $\bar{P}_{t-1} < 1$, the *Soil* supply is based on (1) the time weighted average excess of Beans in the $\phi:Y$ liquidity pool over the previous Season, and (2) the ϕ in the *Silo* at the end of the previous Season. When $1 < \bar{P}_{t-1}$ the *Soil* supply is based on (1) the number of *Pods* that ripen and become *Harvestable* at the beginning of the Season, and (2) the *Weather*.

Beanstalk is willing to issue debt every Season. To mint *Soil* every Season without increasing the number of *Unharvestable Pods* during periods of excess demand for *Soil*, Beanstalk is willing to issue at most the same number of *Pods* each Season as became *Harvestable* at the start of the Season.

The *Minimum Soil* at the beginning of t (S_t^{\min}), such that $S_t^{\min} \in \{j \times 10^{-6} \mid j \in \mathbb{Z}^+\}$, Beanstalk has outstanding for a given h_t and w is:

$$S_t^{\min} = \frac{h_t}{\left(1 + \frac{w}{100}\right)}$$

Therefore, the *Soil* supply at the beginning of each Season (S_t^{start}), such that $S_t^{\text{start}} \in \{j \times 10^{-6} \mid j \in \mathbb{Z}^+\}$, for a given $\Delta\bar{b}_{t-1}$ and S_t^{\min} is:

$$S_t^{\text{start}} = \max(-\Delta\bar{b}_{t-1}, S_t^{\min})$$

8.4 Weather

Beanstalk regularly crosses the price of $\phi 1$ over its value peg during long run decreases and increases in demand for Beans primarily by adjusting the *Weather* each Season.

At the beginning of t , Beanstalk changes the *Weather* depending on its debt level and current state with respect to ideal equilibrium. The current state (defined below) is a function of the position of Beanstalk with respect to ideal equilibrium and changing demand for *Soil*. The position of Beanstalk with respect to ideal equilibrium is a function of \bar{P}_{t-1} and the Beanstalk debt level.

8.4.1 Debt Level

The *Pod Rate* (R^D), such that $R^D \in \{j \times 10^{-6} \mid j \in \mathbb{N}\}$, represents the Beanstalk debt level relative to the Bean supply. *Weather* changes are determined in part by R^D .

Beanstalk does not consider *Sown* \emptyset , *Burnt* \emptyset or *Unharvestable Pods*, but does consider *Harvestable Pods*, as part of the total Bean supply.

We define the total Bean supply (B) for a given total Beans minted over all *Seasons* (M), such that $B, M, \in \{j \times 10^{-6} \mid j \in \mathbb{Z}^+\}$, total a^{BIP} for all passed *BIPs* (A^{BIP}), total a^q for all committed *BIPs* (A^q), total Beans minted via *BIP* (B^{BIP}) (e.g., *Fundraisers*), total *Burnt Beans* over all *Seasons* (μ) and total *Sown* \emptyset over all *Seasons* (U), such that $A^{\text{BIP}}, A^q, B^{\text{BIP}}, \mu, U \in \{j \times 10^{-6} \mid j \in \mathbb{N}\}$, as:

$$B = M + A^{\text{BIP}} + A^q + B^{\text{BIP}} - (\mu + U)$$

We define the R^D for a given D and B as:

$$R^D = \frac{D}{B}$$

Beanstalk requires three R^D levels to be set: (1) $R^{D^{\text{lower}}}$, below which debt is considered excessively low, (2) R^{D^*} , an optimal level of debt, and (3) $R^{D^{\text{upper}}}$, above which debt is considered excessively high, such that $R^{D^{\text{lower}}}, R^{D^*}, R^{D^{\text{upper}}} \in \{j \times 10^{-6} \mid j \in \mathbb{Z}^+\}$. When R^D is between $R^{D^{\text{lower}}}$ and $R^{D^{\text{upper}}}$, but not optimal, R^D is considered reasonable.

When R^D is excessively high or low, Beanstalk changes the *Weather* more aggressively.




Figure 3: Debt Level

8.4.2 Position

The position of Beanstalk with respect to ideal equilibrium can be represented on a graph with axes \bar{P} and R^D , and ideal equilibrium at the origin ($R^{D^*}, 1$). The current state of Beanstalk is in part determined by the position of Beanstalk with respect to ideal equilibrium.

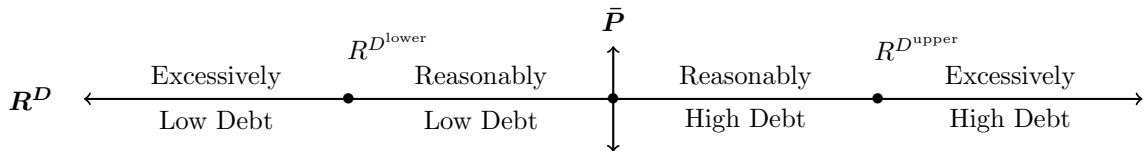


Figure 4: Position

8.4.3 Direction

The position of Beanstalk with respect to ideal equilibrium changes each *Season*. The current state of Beanstalk with respect to ideal equilibrium is in part determined by the direction of this change.

The direction of change in position of Beanstalk is considered either toward or away from ideal equilibrium, based on the current R^D and \bar{P}_{t-1} . When $1 < \bar{P}_{t-1}$, debt can only decrease or remain constant; when $\bar{P}_{t-1} < 1$, debt can only increase or remain constant.

Therefore, when $R^{D*} < R^D$ (i.e., there is more debt than optimal):

- If $1 < \bar{P}_{t-1}$, Beanstalk moves toward ideal equilibrium; or
- If $\bar{P}_{t-1} < 1$, Beanstalk moves away from ideal equilibrium.

When $R^D < R^{D*}$ (i.e., there is less debt than optimal):

- If $1 < \bar{P}_{t-1}$, Beanstalk moves away from ideal equilibrium; or
- If $\bar{P}_{t-1} < 1$, Beanstalk moves toward ideal equilibrium.

		R^D			
		Excessively Low Debt	Reasonably Low Debt	Reasonably High Debt	Excessively High Debt
\bar{P}	$\bar{P}_{t-1} > 1$	Away From	Away From	Toward	Toward
	$\bar{P}_{t-1} < 1$	Toward	Toward	Away From	Away From

Figure 5: Direction

8.4.4 Acceleration

The rate of change of position of Beanstalk changes each *Season*. The current state of Beanstalk with respect to ideal equilibrium is also determined by its acceleration.

The acceleration of Beanstalk is considered decelerating, steady or accelerating, based on \bar{P}_{t-1} and changing demand for *Soil* (defined below).

When demand for *Soil* is decreasing:

- If $1 < \bar{P}_{t-1}$, Beanstalk is decelerating; or
- If $\bar{P}_{t-1} < 1$, Beanstalk is accelerating.

When demand for *Soil* is steady, Beanstalk is steady. When demand for *Soil* is increasing:

- If $1 < \bar{P}_{t-1}$, Beanstalk is accelerating; or
- If $\bar{P}_{t-1} < 1$, Beanstalk is decelerating.

		Demand		
		Decreasing Demand	Steady Demand	Increasing Demand
\bar{P}	$\bar{P}_{t-1} > 1$	Decelerating	Steady	Accelerating
	$\bar{P}_{t-1} < 1$	Accelerating	Steady	Decelerating

Figure 6: Acceleration

8.4.5 Demand for Soil

In order to properly classify its acceleration, Beanstalk must accurately measure changing demand for *Soil*. Demand for *Soil* is considered decreasing, steady or increasing.

The change in *Soil* from the beginning to the end of each *Season* (ΔS_t), such that $\Delta S_t \in \{j \times 10^{-6} \mid j \in \mathbb{N}\}$, indicates demand for *Soil* over the course of that *Season*. The rate of change of ΔS_t from *Season* to *Season* ($\frac{\partial \Delta S}{\partial t}$), such that $\frac{\partial \Delta S}{\partial t} \in \{j \times 10^{-6} \mid j \in \mathbb{N}\}$, indicates changing demand for *Soil*.

We define ΔS_t for a given S_t^{start} and *Soil* supply at the end of that *Season* (S_t^{end}), such that $S_t^{\text{end}} \in \{j \times 10^{-6} \mid j \in \mathbb{Z}^+\}$, as:

$$\Delta S_t = S_t^{\text{start}} - S_t^{\text{end}}$$

We define $\frac{\partial \Delta S}{\partial t}$ for given ΔS_t over the previous two *Seasons*, ΔS_{t-1} and ΔS_{t-2} , respectively, as:

$$\frac{\partial \Delta S}{\partial t} = \frac{\Delta S_{t-1}}{\Delta S_{t-2}}$$

Beanstalk requires two $\frac{\partial \Delta S}{\partial t}$ levels to be set: (1) $\frac{\partial \Delta S}{\partial t}^{\text{lower}}$, below which demand for *Soil* is considered decreasing, and (2) $\frac{\partial \Delta S}{\partial t}^{\text{upper}}$, above which demand for *Soil* is considered increasing, such that $\frac{\partial \Delta S}{\partial t}^{\text{lower}}, \frac{\partial \Delta S}{\partial t}^{\text{upper}} \in \{j \times 10^{-6} \mid j \in \mathbb{Z}^+\}$. When $\frac{\partial \Delta S}{\partial t}$ is between $\frac{\partial \Delta S}{\partial t}^{\text{lower}}$ and $\frac{\partial \Delta S}{\partial t}^{\text{upper}}$, demand for *Soil* is considered steady.




Figure 7: Soil Demand Changes From $\frac{\partial \Delta S}{\partial t}$

However, when Beans are *Sown* in all *Soil* in a *Season* (defined as $S_t^{\text{end}} \leq 1$), $\frac{\partial \Delta S}{\partial t}$ can inaccurately measure changing demand for *Soil*. The first time Beans are *Sown* in all but at most one *Soil* in a *Season*, after one or more *Seasons* where Beans were not *Sown* in all but at most one *Soil*, demand for *Soil* is considered increasing. When Beans are *Sown* in all but at most one *Soil* in consecutive *Seasons* (i.e., $t-1$ and $t-2$), the difference in time it took for the Beans to be *Sown* in all but at most one *Soil* over the previous two *Seasons* (ΔE_t^u), such that $\Delta E_t^u \in \mathbb{Z}$, can provide a more accurate measurement.

In order to measure ΔE_t^u , Beanstalk logs the time of the first *Sow* such that Beans are *Sown* in all but at most one *Soil* in each *Season* ($E_t^{u, \text{first}}$), such that $E_t^{u, \text{first}} \in \mathbb{N}$, as the difference between the Ethereum timestamp of the first *Sow* in t such that there is at most one *Soil* ($E_t^{u, \text{first}}$) and E_t .

We define $\Delta E_t^{u, \text{first}}$ for a given $E_t^{u, \text{first}}$ and E_t as:

$$\Delta E_t^{u, \text{first}} = E_t^{u, \text{first}} - E_t$$

If Beans were *Sown* in all but at most one *Soil* in the first 5 minutes of the previous *Season* (i.e., $\Delta E_{t-1}^{u, \text{first}} < 300$), demand for *Soil* is considered increasing. If Beans were *Sown* in all but at most one *Soil* in both $t-1$ and $t-2$, but $300 \leq \Delta E_{t-1}^{u, \text{first}}$, at the beginning of t Beanstalk compares $\Delta E_{t-1}^{u, \text{first}}$ with $\Delta E_{t-2}^{u, \text{first}}$.

We define ΔE_t^u for a given $\Delta E_{t-1}^{u, \text{first}}$ and $\Delta E_{t-2}^{u, \text{first}}$ as:

$$\Delta E_t^u = \Delta E_{t-2}^{u, \text{first}} - \Delta E_{t-1}^{u, \text{first}}$$

If the above condition is met, changing demand for *Soil* is measured by ΔE_t^u . Beanstalk requires two ΔE_t^u levels to be set: (1) $\Delta E_t^{u, \text{lower}}$, below which demand for *Soil* is considered decreasing, and (2)

$\Delta E_t^{u\text{upper}}$, above which demand for *Soil* is considered increasing, such that $\Delta E_t^{u\text{lower}}, \Delta E_t^{u\text{upper}} \in \mathbb{Z}$. When ΔE_t^u is between $\Delta E_t^{u\text{lower}}$ and $\Delta E_t^{u\text{upper}}$, demand for *Soil* is considered steady.

Thus, Beanstalk measures changing demand for *Soil*.




Figure 8: Soil Demand Changes From ΔE_t^u

8.4.6 Current State

The *Weather* change is also determined in part by the current state of Beanstalk with respect to ideal equilibrium.

We define the current state of Beanstalk as the combination of its direction and acceleration with respect to ideal equilibrium. With two potential directions and three potential accelerations, Beanstalk has six potential current states:

- Accelerating away from ideal equilibrium;
- Steady away from ideal equilibrium;
- Decelerating away from ideal equilibrium;
- Accelerating toward ideal equilibrium;
- Steady toward ideal equilibrium; and
- Decelerating toward ideal equilibrium.

		Acceleration		
		Decelerating	Steady	Accelerating
Direction	Away From	Decelerating Away From	Steady Away From	Accelerating Away From
	Toward	Decelerating Toward	Steady Toward	Accelerating Toward

Figure 9: Current State

8.4.7 Optimal State

Beanstalk changes the *Weather* at the beginning of t in an attempt to maintain an optimal state, or to move Beanstalk from its current state into an optimal state.

An optimal state of Beanstalk is an optimal current state determined by its current debt level.

We define an optimal state of Beanstalk as accelerating toward ideal equilibrium or either steady or decelerating toward ideal equilibrium. When R^D is excessively high or low, an optimal state is accelerating toward ideal equilibrium. When R^D is reasonably high or low, an optimal state is either steady or decelerating toward ideal equilibrium.

Optimal State	R^D			
	Excessively Low Debt	Reasonably Low Debt	Reasonably High Debt	Excessively High Debt
	Accelerating Toward	Steady or Decelerating Toward	Steady or Decelerating Toward	Accelerating Toward

Figure 10: Optimal State

8.4.8 Weather Changes

The *Weather* change at the beginning of t is determined by R^D and the current state of Beanstalk with respect to ideal equilibrium.

When $R^{D^{\text{upper}}} \leq R^D$ (i.e., debt is excessively high):

- If the current state is accelerating or steady away from ideal equilibrium, the *Weather* is raised 3%;
- If the current state is decelerating away from ideal equilibrium, the *Weather* is raised 1%;
- If the current state is decelerating toward ideal equilibrium, the *Weather* is kept constant;
- If the current state is steady toward ideal equilibrium, the *Weather* is lowered 1%; or
- If the current state is accelerating toward ideal equilibrium, the *Weather* is lowered 3%.

When $R^{D^*} \leq R^D < R^{D^{\text{upper}}}$ (i.e., debt is reasonably high):

- If the current state is accelerating or steady away from ideal equilibrium, the *Weather* is raised 3%;
- If the current state is decelerating away from ideal equilibrium, the *Weather* is raised 1%;
- If the current state is decelerating toward ideal equilibrium, the *Weather* is kept constant;
- If the current state is steady toward ideal equilibrium, the *Weather* is lowered 1%; or
- If the current state is accelerating toward ideal equilibrium, the *Weather* is lowered 3%.

When $R^{D^{\text{lower}}} \leq R^D < R^{D^*}$ (i.e., debt is reasonably low):

- If the current state is accelerating or steady away from ideal equilibrium, the *Weather* is lowered 3%;
- If the current state is decelerating away from ideal equilibrium, the *Weather* is lowered 1%;
- If the current state is decelerating toward ideal equilibrium, the *Weather* is kept constant;
- If the current state is steady toward ideal equilibrium, the *Weather* is raised 1%; or
- If the current state is accelerating toward ideal equilibrium, the *Weather* is raised 3%.

When $R^D < R^{D^{\text{lower}}}$ (i.e., debt is excessively low):

- If the current state is accelerating or steady away from ideal equilibrium, the *Weather* is lowered 3%;
- If the current state is decelerating away from ideal equilibrium, the *Weather* is lowered 1%;
- If the current state is decelerating toward ideal equilibrium, the *Weather* is kept constant;
- If the current state is steady toward ideal equilibrium, the *Weather* is raised 1%; or
- If the current state is accelerating toward ideal equilibrium, the *Weather* is raised 3%.

Thus, Beanstalk changes the *Weather* to regularly cross the price of $\emptyset 1$ over its value peg during long run decreases and increases in demand for Beans.

		R^D			
		Excessively Low Debt	Reasonably Low Debt	Reasonably High Debt	Excessively High Debt
Current State	Accelerating Away From	-3	-3	3	3
	Steady Away From	-3	-3	3	3
	Decelerating Away From	-1	-1	1	1
	Decelerating Toward	0	0	0	0
	Steady Toward	1	1	-1	-1
	Accelerating Toward	3	3	-3	-3

Figure 11: Weather Changes From Current State and R^D

		R^D				
		Excessively Low Debt	Reasonably Low Debt	Reasonably High Debt	Excessively High Debt	
\bar{P} & Demand Changes	$\bar{P}_{t-1} > 1$	Increasing	-3	-3	-3	-3
		Steady	-3	-3	-1	-1
		Decreasing	-1	-1	0	0
	$\bar{P}_{t-1} < 1$	Increasing	0	0	1	1
		Steady	1	1	3	3
		Decreasing	3	3	3	3

Figure 12: Weather Changes From \bar{P} , Demand Changes and R^D

8.5 Sale on Uniswap

Beanstalk sells newly minted Beans on Uniswap during long run increases in demand for Beans when increasing the Bean supply and lowering the *Weather* has not crossed the price of $\emptyset 1$ over its value peg.

If at the beginning of t , $1 < \bar{P}_{t-1}$ and $R^D < R^{D^{\text{lower}}}$, it is *Raining*. If it *Rains* for ξ consecutive *Seasons* or more, each *Season* in which it continues to *Rain* is a *Season of Plenty*. At the beginning of a *Season of Plenty*, Beanstalk crosses the price of $\emptyset 1$ over its value peg by minting additional Beans and selling them directly on Uniswap. Proceeds of Y from the sale are distributed to *Stalk* owners at the beginning of t in proportion to their *Stalk* ownership when it started *Raining*. Also at the beginning of a *Season of Plenty*, all *Pods* that grew from *Sown* \emptyset before it started *Raining* ripen and become *Harvestable*.

The number of Beans that are minted and sold on Uniswap to return the price of $\emptyset 1$ to its value peg (Δb_{t-1}) is calculated from the difference between the optimal number of Beans in the $\emptyset:Y$ liquidity pool at the end of the previous *Season* (b_{t-1}^*), such that $\Delta b_{t-1}, b_{t-1}^* \in \{j \times 10^{-6} \mid j \in \mathbb{Z}^+\}$, and b_{t-1} .

We define b_{t-1}^* for a given b_{t-1} , y_{t-1} , number of X in the $X:Y$ liquidity pool at the end of the previous *Season* (x_{t-1}), such that $x_{t-1} \in \{j \times 10^{-6} \mid j \in \mathbb{Z}^+\}$, and number of Y in the $X:Y$ liquidity pool at the end of the previous *Season* (n_{t-1}), such that $n_{t-1} \in \{j \times 10^{-18} \mid j \in \mathbb{Z}^+\}$, as:

$$b_{t-1}^* = \sqrt{\frac{b_{t-1} \times y_{t-1} \times x_{t-1}}{n_{t-1}}}$$

We define Δb_{t-1} for a given b_{t-1}^* and b_{t-1} as:

$$\Delta b_{t-1} = \frac{\lceil b_{t-1}^* - b_{t-1} \rceil}{0.9985}$$

In a *Season of Plenty*, m_t for a given number of *Unharvestable Pods* that grew prior to the start of the *Rain* (D_r), such that $D_r \in \{j \times 10^{-6} \mid j \in \mathbb{N}\}$, a_t , $\Delta \bar{b}_{t-1}$, and Δb_{t-1} is:

$$m_t = D_r + a_t + \Delta \bar{b}_{t-1} + \Delta b_{t-1}$$

Thus, Beanstalk regularly crosses the price of $\emptyset 1$ over its value peg.

9 Economics

Beanstalk is designed from economic first principles to increase censorship resistance, liquidity and stability over time.

9.1 Ownership Concentration

A design that lowers the Gini coefficient²¹ of Beans and *Stalk* over time is essential to censorship resistance.

Beanstalk does not require a pre-mine. The first 100 Beans are created when the `init()` function is called to deploy Beanstalk.

Older *Deposits* have their *Stalk* from *Seeds* diluted relative to newer *Deposits* every *Season*. Therefore, newly minted Beans are more widely distributed over time.

9.2 Strong Credit

Beanstalk is credit based and only fails if it can no longer attract creditors. A reasonable level of debt, a strong credit history and a competitive interest rate attract creditors.

Beanstalk changes the *Weather* to return R^D to R^{D^*} while regularly crossing the price of $\emptyset 1$ over its value peg. Beanstalk acts more aggressively when R^D is excessively high or low.

Beanstalk never defaults on debt and is willing to issue *Pods* every *Season*.

9.3 Marginal Rate of Substitution

There are a wide variety of opportunities Beanstalk has to compete with for creditors. Beanstalk does not define an optimal *Weather*, but instead adjusts it to move closer to ideal equilibrium.

²¹ wikipedia.org/wiki/Gini_coefficient

9.4 Low Friction

Minimizing the cost of using Beans and barriers to working on the *Bean Farm* maximizes utility for users and appeal to creditors.

A Beanstalk website code base is published alongside the Beanstalk code base to ensure widespread availability of user-friendly and cost-efficient access to Beanstalk.

The FIFO *Pod Harvest* schedule allows smaller *Bean Farmers* to participate in peg maintenance and decreases the benefit of large scale price manipulation. The combination of non-expiry, the FIFO *Harvest* schedule and transferability enables *Bean Farmers* to Sow Beans as efficiently as possible. By maximizing the efficiency of the *Soil* market, Beanstalk minimizes its cost to attract creditors, the durations and magnitudes of price deviations below its value peg, and excess Bean minting.

9.5 Equilibrium

Equilibrium is a state of equivalent marginal quantity supplied and demanded. Beanstalk affects the marginal supply of and demand for Beans to regularly cross the equilibrium price of $\emptyset 1$ over its value peg.

While Beanstalk can arbitrarily increase the Bean supply when the equilibrium price of $\emptyset 1$ is above its value peg, Beanstalk cannot arbitrarily decrease the Bean supply when the equilibrium price of $\emptyset 1$ is below it. Beanstalk relies on the codependence between the equilibria of Beans and *Soil* to work around this limitation.

In order to Sow Beans, they must be acquired (*i.e.*, marginal demand for *Soil* affects marginal demand for Beans). The marginal demand for *Soil* is a function of the *Weather* and the Bean price. By changing the *Weather*, Beanstalk affects decreases in the Bean supply.

9.6 Incentives

Silo Members and *Bean Farmers* are financially motivated actors. Beanstalk-native financial incentives consistently increase censorship resistance, liquidity and stability over time.

The *Stalk System* incentivizes (1) leaving assets *Deposited* in the *Silo* continuously by creating opportunity cost to *Withdrawing* assets from the *Silo*, (2) adding value to the $\emptyset:Y$ liquidity pool by rewarding more *Seeds* to *Deposited* λ than *Deposited* \emptyset , and (3) returning the price of $\emptyset 1$ to its value peg by allowing *Converting* \emptyset *Deposits* to ϕ *Deposits* when the price of $\emptyset 1$ is above its value peg, and *Converting* ϕ *Deposits* to \emptyset *Deposits* when the price of $\emptyset 1$ is below its value peg, without forfeiting *Stalk* from *Seeds*.

Beanstalk is governed by *Stalk* owners. Anyone with *Stalk* stands to profit from future growth of Beanstalk, but are not owed anything by Beanstalk. The inability for the submitter of a *BIP* to entirely *Withdraw* from the *Silo* during its *Voting Period* further aligns their interests with Beanstalk.

When \bar{P}_t is below its value peg, there is an incentive to *Withdraw* assets from the *Silo*. The combination of the *Stalk System* and ξ *Season Freeze* on *Withdrawals* reduces this incentive significantly.

When \bar{P}_t is above its value peg, there is an incentive to buy Beans to earn a portion of the upcoming Bean inflation. This is exacerbated when R^D is lower. The combination of the commitment to automatically cross the price of $\emptyset 1$ over its value peg and pay Y proceeds from the sale to *Stalk* owners at the start of the *Rain* who still own *Stalk*, and the ξ *Season Freeze* on *Withdrawals*, removes this incentive entirely during *Seasons* where R^D is excessively low, and reduces it significantly otherwise.

Thus, Beanstalk consistently increases censorship resistance, liquidity and stability over time.

10 Risk

There are numerous risks associated with Beanstalk. This is not an exhaustive list.

The Beanstalk code base is unaudited. The Beanstalk peg maintenance mechanism is novel. Neither has been tested in the “real world” prior to the initial Beanstalk deployment. The open source nature of Beanstalk means that others can take advantage of any bugs, flaws or deficiencies in Beanstalk and launch identical or very similar stablecoin implementations.

A decentralized implementation of Beanstalk has three external dependencies: (1) a trustless computer network that supports fungible token standards, (2) a decentralized exchange protocol that runs on the trustless computer network, and (3) a first generation stablecoin native to the trustless computer network that offers convertibility to the value peg and trades on the decentralized exchange protocol.

To date, the Ethereum blockchain is the most developed decentralized smart contract platform and has an active community, the ERC-20 Standard is the most widely used fungible token standard, Uniswap is one of the largest Ethereum-native decentralized exchange protocol by volume,²² and USDC is the largest convertible USD stablecoin by market capitalization and volume on Uniswap.²³ In general, open source protocols with large amounts of value on them (e.g., Ethereum, Uniswap and USDC) are high value targets for exploits. Long track records indicate security. We assume the security of the Ethereum blockchain, ERC-20 Standard and Uniswap.

There is no guarantee the centralized operators of USDC will not ban USDC from Uniswap, although this would cause significant financial self-harm. The operators of USDC may alter their convertibility policy, which would negatively affect the accuracy of USDC as a price source for USD.

The Beanstalk price oracle contains exposure to custody risk for the underlying collateral of X (e.g., USDC). However, in theory, in cases where the collateral is lost or feared to be lost, the price of X will most likely fall below V . This would cause some short run excess inflation of the Bean supply until X is replaced in the price oracle, but would not otherwise directly affect Beanstalk.

11 Future Work

Beanstalk is a work in progress. There are a number of potential improvements that can be incorporated into Beanstalk as one or more *BIPs*.

Stalk and *Seeds* will become liquid shortly after the initial Beanstalk deployment. Deposits also can become liquid assets to further decrease friction.

Assets that receive yield from other protocols can be added to Λ .

²² defiprime.com/dex-volume

²³ info.uniswap.org/

The mechanism to measure changing demand for *Soil*, in cases where $\frac{\partial \Delta S}{\partial t}$ can inaccurately indicate changing demand for *Soil*, can be further refined.

Additional *X* and Ethereum-native decentralized exchanges can be incorporated into $\bar{P}^{X:Y}$.

Additional tokens can be *Deposited* into the *Silo*.

The Beanstalk website can be improved to include more live data and analytical tools.

In the future, we expect Beanstalk to issue unique assets with different value pegs on Ethereum and other decentralized networks.

12 Appendix

12.1 Current Parameters

The following are the current parameters of Beanstalk:

- $\xi = 24 - \min(12, \max(\lfloor \frac{t-3612}{84} \rfloor, 0)) - \min(8, \max(\lfloor \frac{t-4620}{168} \rfloor, 0))$;
- $K^{\min} = 0.1\%$;
- $w_1 = 1$;
- $R^{S^{\min}} = 0.1\%$;
- $R^{S^{\max}} = 25\%$;
- $R^{D^{\text{lower}}} = 5\%$;
- $R^{D^*} = 15\%$;
- $R^{D^{\text{upper}}} = 25\%$;
- $\frac{\partial \Delta S}{\partial t}^{\text{lower}} = 95\%$;
- $\frac{\partial \Delta S}{\partial t}^{\text{upper}} = 105\%$;
- $\frac{\partial R^S}{\partial t}^{\text{upper}} = 105\%$;
- $\Delta E_t^{u^{\text{lower}}} = -60$; and
- $\Delta E_t^{u^{\text{upper}}} = 60$.

12.2 Whitelist

The following ERC-20 Standard tokens are whitelisted for *Deposit* in the *Silo*.

12.2.1 \emptyset

1. **Token Address:** The \emptyset token address is 0xDC59ac4FeFa32293A95889Dc396682858d52e5Db.
2. **BDV function:** The BDV of 1 \emptyset is 1 \emptyset . Therefore, we define $g^\emptyset(z^\emptyset)$ as:

$$g^\emptyset(z^\emptyset) = z^\emptyset$$

3. **Stalk per BDV:** \emptyset *Deposits* receive 1 Stalk per BDV upon *Deposit* (i.e., $k^\emptyset = 1$).
4. **Seed per BDV:** \emptyset *Deposits* receive 2 Seeds per BDV upon *Deposit* (i.e., $c^\emptyset = 2$).

12.2.2 ϕ

1. **Token Address:** The ϕ token address is 0x87898263b6c5babe34b4ec53f22d98430b91e371.
2. **BDV function:** The BDV of ϕ is determined using the last traded price in the BEAN:ETH Uniswap v2 pool unless there was an interaction with the pool in the current block. The last traded price is a function of the number of Beans in the pool in the current block (ϕ_Ξ^\emptyset), such that $\phi_\Xi^\emptyset \in \{j \times 10^{-6} \mid j \in \mathbb{Z}^+\}$. If there was an interaction with the pool in the current block, Beanstalk uses the time weighted average number of Beans in the pool from the start of the current *Season* to the current block ($\bar{\phi}_t^\emptyset$), such that $\bar{\phi}_t^\emptyset \in \{j \times 10^{-6} \mid j \in \mathbb{Z}^+\}$ unless the `sunrise()` function was also called in the current block. If there was an interaction with the pool and the `sunrise()` function was called in the current block, ϕ *Deposits* are not accepted. Therefore, we define $g^\phi(z^\phi)$ for a given timestamp of the last interaction with the pool (E_ϕ), current block timestamp (E_Ξ), E_t , $\bar{\phi}_t^\emptyset$, the total number of ϕ in the current block (ϕ_Ξ), such that $\phi_\Xi \in \{j \times 10^{-6} \mid j \in \mathbb{Z}^+\}$, and ϕ_Ξ^\emptyset as:

$$g^\phi(z^\phi) = \begin{cases} \text{FAIL} & \text{if } E_\phi = E_\Xi \ \& \ E_\Xi = E_t \\ \frac{z^\phi \times 2 \times \bar{\phi}_t^\emptyset}{\phi_\Xi} & \text{if } E_\phi = E_\Xi \\ \frac{z^\phi \times 2 \times \phi_\Xi^\emptyset}{\phi_\Xi} & \text{else} \end{cases}$$

3. **Stalk per BDV:** ϕ *Deposits* receive 1 Stalk per BDV upon *Deposit* (i.e., $k^\phi = 1$).
4. **Seed per BDV:** ϕ *Deposits* receive 4 Seeds per BDV upon *Deposit* (i.e., $c^\phi = 4$).

12.2.3 BEAN:3CRV Curve LP Tokens (Φ)

1. **Token Address:** The Φ token address is 0x3a70DfA7d2262988064A2D051dd47521E43c9BdD.
2. **BDV function:** The BDV of Φ is determined using the number of Beans ($\Phi_{\Xi-1}^\emptyset$) and number of 3CRV ($\Phi_{\Xi-1}^{3CRV}$) in the BEAN:3CRV Curve pool in the last block, the 3CRV virtual price (P^{3CRV}), the A parameter of the pool (Φ^A), and the Φ virtual price (P^Φ), such that $\Phi_{\Xi-1}^\emptyset, \Phi_{\Xi-1}^{3CRV}, P^{3CRV}, \Phi^A, P^\Phi \in \{j \times 10^{-6} \mid j \in \mathbb{Z}^+\}$.

Beanstalk calculates a flash-loan-resistant price invariant for the BEAN:3CRV Curve pool (ζ^Φ), such that $\zeta^\Phi \in \{j \times 10^{-6} \mid j \in \mathbb{Z}^+\}$, by using the Curve²⁴ `get_D()` function on $\Phi_{\Xi-1}^\Phi$, $\Phi_{\Xi-1}^{3CRV}$, P^{3CRV} and Φ^A as:

$$\zeta^\Phi = \text{get_D}([\Phi_{\Xi-1}^\Phi, \Phi_{\Xi-1}^{3CRV} \times P^{3CRV}], \Phi^A)$$

Beanstalk calculates a flash-loan-resistant total number of Φ ($\Phi_{\Xi-1}$), such that $\Phi_{\Xi-1} \in \{j \times 10^{-6} \mid j \in \mathbb{Z}^+\}$, from ζ^Φ and P^Φ as:

$$\Phi_{\Xi-1} = \frac{\zeta^\Phi}{P^\Phi}$$

Beanstalk calculates the USD price of Bean from the BEAN:3CRV Curve pool ($\$\Phi(\Phi)$), such that $\$\Phi(\Phi) \in \{j \times 10^{-6} \mid j \in \mathbb{Z}^+\}$, by using the Curve `get_y()` function on $\Phi_{\Xi-1}^\Phi$, $\Phi_{\Xi-1}^{3CRV}$ and P^{3CRV} as:

$$\$\Phi(\Phi) = \Phi_{\Xi-1}^\Phi - \text{get_y}(0, 1, \Phi_{\Xi-1}^\Phi + 1, [\Phi_{\Xi-1}^\Phi, \Phi_{\Xi-1}^{3CRV} \times P^{3CRV}]) - 10^{-6}$$

Beanstalk calculates the BDV of 3CRV $g^{3CRV}(z^{3CRV})$ from $\$\Phi(\Phi)$ and P^{3CRV} as:

$$g^{3CRV}(z^{3CRV}) = \frac{z^{3CRV} \times P^{3CRV}}{\$\Phi(\Phi)}$$

Therefore, we define $g^\Phi(z^\Phi)$ for a given $\Phi_{\Xi-1}^\Phi$, $g^{3CRV}(z^{3CRV})$, $\Phi_{\Xi-1}^{3CRV}$ and $\Phi_{\Xi-1}$ as:

$$g^\Phi(z^\Phi) = \frac{z^\Phi \times (\Phi_{\Xi-1}^\Phi + g^{3CRV}(\Phi_{\Xi-1}^{3CRV}))}{\Phi_{\Xi-1}}$$

3. **Stalk per BDV:** Φ Deposits receive 1 Stalk per BDV upon Deposit (i.e., $k^\Phi = 1$).

4. **Seed per BDV:** Φ Deposits receive 4 Seeds per BDV upon Deposit (i.e., $c^\Phi = 4$).

12.2.4 BEAN:LUSD Curve LP Tokens (α)

1. **Token Address:** The α token address is 0xD652c40fBb3f06d6B58Cb9aa9CFF063eE63d465D.

2. **BDV function:** The BDV of α is determined using the number of LUSD ($\Omega_{\Xi-1}^{LUSD}$) and number of 3CRV ($\Omega_{\Xi-1}^{3CRV}$) in the LUSD:3CRV Curve pool (Ω) in the last block, the A parameter of the pool (Ω^A), the Ω virtual price (P^Ω), the α virtual price (P^α), such that $\Omega_{\Xi-1}^{LUSD}$, $\Omega_{\Xi-1}^{3CRV}$, Ω^A , P^Ω , $P^\alpha \in \{j \times 10^{-6} \mid j \in \mathbb{Z}^+\}$, P^{3CRV} and $\$\Phi(\Phi)$.

Beanstalk calculates a flash-loan-resistant price invariant for the LUSD:3CRV Curve pool (ζ^Ω), such that $\zeta^\Omega \in \{j \times 10^{-6} \mid j \in \mathbb{Z}^+\}$, by using the Curve `get_D()` function on $\Omega_{\Xi-1}^{LUSD}$, $\Omega_{\Xi-1}^{3CRV}$, P^{3CRV} and Ω^A as:

$$\zeta^\Omega = \text{get_D}([\Omega_{\Xi-1}^{LUSD}, \Omega_{\Xi-1}^{3CRV} \times P^{3CRV}], \Omega^A)$$

Beanstalk calculates a flash-loan-resistant total number of Ω ($\Omega_{\Xi-1}$), such that $\Omega_{\Xi-1} \in \{j \times 10^{-6} \mid j \in \mathbb{Z}^+\}$, from ζ^Ω and P^Ω as:

$$\Omega_{\Xi-1} = \frac{\zeta^\Omega}{P^\Omega}$$

Beanstalk calculates the USD price of LUSD from the LUSD:3CRV Curve pool ($\$\text{LUSD}(\Omega)$), such that $\$\text{LUSD}(\Omega) \in \{j \times 10^{-6} \mid j \in \mathbb{Z}^+\}$, by using the Curve `get_y()` function on $\Omega_{\Xi-1}^{LUSD}$, $\Omega_{\Xi-1}^{3CRV}$ and P^{3CRV} as:

$$\$\text{LUSD}(\Omega) = (\Omega_{\Xi-1}^{LUSD} - \text{get_y}(0, 1, \Omega_{\Xi-1}^{LUSD} + 1, [\Omega_{\Xi-1}^{LUSD}, \Omega_{\Xi-1}^{3CRV} \times P^{3CRV}]) - 10^{-6})$$

Therefore, we define $g^\alpha(z^\alpha)$ for a given P^α , $\$\text{LUSD}(\Omega)$ and $\$\Phi(\Phi)$ as:

$$g^\alpha(z^\alpha) = z^\alpha \times P^\alpha \times \min\left(1, \frac{\$\text{LUSD}(\Omega)}{\$\Phi(\Phi)}\right)$$

²⁴ <https://github.com/curvefi/curve-factory>

3. **Stalk per BDV:** α Deposits receive 1 Stalk per BDV upon Deposit (i.e., $k^\alpha = 1$).
4. **Seed per BDV:** α Deposits receive 3 Seeds per BDV upon Deposit (i.e., $c^\alpha = 3$).

12.3 Farmers Market

Pods can be bought and sold in a decentralized fashion at the *Farmers Market*.

12.3.1 Pod Orders

Anyone with Beans not in the *Silo* can *Order Pods*.

A *Pod Order* has three inputs: (1) the maximum number of *Pods* to be purchased, (2) the maximum price per *Pod*, denominated in Beans, and (3) the maximum place in the *Pod Line* (i.e., the number of *Pods* that will become *Harvestable* before a given *Pod*) to purchase from.

A *Pod Order* can be *Cancelled* at any time until it is *Filled*. To facilitate instant clearance, Beans are locked in a *Pod Order* until it is entirely *Filled* or *Cancelled*. Beans can only be locked in a single *Pod Order* at a time.

12.3.2 Pod Listings

Pods that grow from Beans that were *Sown* in the same transaction form a *Plot*. Anyone with a *Plot* can *List* a whole or partial *Plot* for Beans. By default, the portion of a *Plot* in a partial *Pod Listing* that is farthest from the front of the *Pod Line* is *Listed*.

A *Pod Listing* has five inputs: (1) the *Plot* being *Listed*, (2) the difference between the front of the portion of the *Plot* included in the *Pod Listing* from the front of the whole *Plot*, denominated in *Pods*, where a *null* input *Lists* from the back of the *Plot*, (3) the number of *Pods* in the *Plot* for sale, where a *null* input *Lists* the whole *Plot*, (4) the minimum price per *Pod*, denominated in Beans, and (5) the maximum number of total *Harvestable Pods* over all *Seasons* before the *Pod Listing* expires.

A *Pod Listing* can be *Cancelled* at any time until it is entirely *Filled*. *Plots* can only be *Listed* in a single *Pod Listing* at a time. *Pod Listings* are automatically *Cancelled* if the owner of the *Plot* transfers or re-*Lists* any *Pods* in the *Plot*.

12.3.3 Clearance

An outstanding *Pod Order* can be entirely or partially *Filled* at any time by a seller. If the *Pod Order* is partially *Filled*, the rest of the *Pod Order* remains *Listed*. Similarly, an outstanding *Pod Listing* can be entirely or partially *Filled* at any time by a buyer. If the *Pod Listing* is partially *Filled*, the rest of the *Pod Listing* remains *Listed*.

In instances where $0 < h_t$ causes a *Pod Order* and *Pod Listing* that previously were not overlapping to overlap, either the buyer or seller can *Fill* their order at their preferred price.

12.3.4 Future Work

The *Farmers Market* is a work in progress. There are a number of potential improvements that can be incorporated into the *Farmers Market* as one or more *BIPs*.

Pod Orders and *Pod Listings* can support arbitrary pricing functions.

Multiple *Plots* can be *Listed* in the same *Pod Listing*.

Multiple *Orders* and *Listings* can be *Listed*, *Filled* and *Cancelled* in a single transaction.

Overlapping *Pod Orders* and *Pod Listings* can be cleared automatically.

Deposited Beans can be used to place *Pod Orders*.

12.4 Fundraisers

Fundraisers allow Beanstalk to issue *Pods* in exchange for dollar-pegged assets other than Beans and independent of the *Soil* minting schedule in order to raise funds to facilitate payments in other currencies without directly affecting Beanstalk's normal peg maintenance model (e.g., to cover the cost of an audit). *Fundraisers* are created via *Beanstalk Improvement Proposals* and mint new Beans.

Each *Fundraiser* requires (1) a token address of the token to raise, (2) the number of tokens to raise (i.e., the number of Beans to mint), and (3) the wallet address to send the tokens to upon completion of the *Fundraiser*.

Up to (2) dollar-pegged assets can be exchanged for 1 Bean's worth of *Pods* each, based on the *Weather* at the time of the contribution to the fundraiser. Tokens raised via a *Fundraiser* cannot be distributed until the entire *Fundraiser* is complete.

12.5 Glossary

The following conventions are used throughout this paper:

- Lower case Latin letters are unique values;
- Upper case Latin letters are totals or rates;
- Subscripts are time; and
- Superscripts are modifiers.

The following variables are used throughout this paper:

\emptyset - Beans, the Beanstalk ERC-20 Standard stablecoin.

$\emptyset:Y$ - A new Uniswap v2 liquidity pool of \emptyset and Y .

$\$$ - US Dollars.

$\$\emptyset^{(\Phi)}$ - The USD price of Bean from Φ .

$\$\text{LUSD}^{(\Omega)}$ - The USD price of LUSD from the LUSD:3CRV Curve liquidity pool.

a^{BIP} - The award for submitting a *BIP* that gets accepted.

A^{BIP} - The total a^{BIP} for all passed *BIP*.

a^q - The award for successfully committing an approved *BIP*.

A^q - The total a^q for all committed *BIP*.

a_t - The award for successfully calling the `sunrise()` function for t .

α - LP tokens for the BEAN:LUSD Curve liquidity pool.

B - The total Bean supply.

B^{BIP} - The total Beans minted via *BIPs*.

Bean Farm - The *Silo* and *Field*.

Bean Farmers - Beanstalk creditors.

BIP - A *Beanstalk Improvement Proposal*.

BDV - Flash-loan-resistant Bean-denominated-value.

b_{t-1} - The number of \emptyset in the $\emptyset:Y$ liquidity pool at the end of the previous *Season*.

\bar{b}_{t-1} - The time weighted average number of Beans in the $\emptyset:Y$ liquidity pool over the previous *Season*.

b_{t-1}^* - The optimal number of Beans in the $\emptyset:Y$ liquidity pool at the end of the previous *Season*.

\bar{b}_{t-1}^* - The time weighted average optimal number of Beans in the $\emptyset:Y$ liquidity pool over the previous *Season*.

Cancel - Remove an *Order* or *Listing* from the *Farmers Market*.

Convert - Contribute additional Y to the $\emptyset:Y$ liquidity pool and exchange *Deposited* \emptyset for *Deposited* Λ .

Current State - The combination of Beanstalk's direction and acceleration with respect to ideal equilibrium.

c^α - The number of *Seeds* per BDV of α *Deposited*.

c^ϕ - The number of *Seeds* per BDV of ϕ *Deposited*.

c^λ - The number of *Seeds* per BDV of λ *Deposited*.

c^ϕ - The number of *Seeds* per BDV of ϕ *Deposited*.

c^Φ - The number of *Seeds* per BDV of Φ *Deposited*.

C_t - A *Silo Member's* total *Seeds*.

C_t^λ - The *Seeds* during t for a given Z_i^λ of a *Silo Member* that last updated their *Silo* in t_f .

d - The number of *Pods* that grow from *Sown* ϕ .

D - The total number of unripened *Pods*.

DAO - A Decentralized Autonomous Organization.

DeFi - Decentralized Finance.

Deposit - An asset in the *Silo*.

Depositors - Wallets that *Deposit* assets in the *Silo*.

D_r - The number of *Unharvestable Pods* that grew prior to the start of the *Rain*.

Δb_{t-1} - The number of *Beans* that are minted and sold on Uniswap to cross the price of $\phi 1$ over the value peg at the beginning of a *Season of Plenty*.

$\Delta \bar{b}_{t-1}$ - The time weighted average shortage or excess of *Beans* in the $\phi:Y$ liquidity pool over the previous *Season*.

ΔE_t^u - The difference in time it took for the *Beans* to be *Sown* in all but at most one *Soil* over the previous two *Seasons*.

$\Delta E_t^{\text{first}}$ - The time of the first *Sow* such that *Beans* are *Sown* in all but at most one *Soil* in each *Season*.

$\Delta E_t^{\text{lower}}$ - The ΔE_t^u level below which demand for *Soil* is considered decreasing.

$\Delta E_t^{\text{upper}}$ - The ΔE_t^u level above which demand for *Soil* is considered increasing.

ΔS - The change in *Soil* from the beginning to the end of each *Season*.

$\frac{\partial \Delta S}{\partial t}$ - The rate of change of ΔS from *Season* to *Season*.

$\frac{\partial \Delta S}{\partial t}^{\text{lower}}$ - The $\frac{\partial \Delta S}{\partial t}$ level below which demand for *Soil* is considered decreasing.

$\frac{\partial \Delta S}{\partial t}^{\text{upper}}$ - The $\frac{\partial \Delta S}{\partial t}$ level above which demand for *Soil* is considered increasing.

E - Ethereum block timestamps.

ETH - Ether.

E_1 - The timestamp in the Ethereum block containing the Beanstalk deployment.

E_{BIP} - The end of a *Voting Period*.

E_Ξ - The current block timestamp.

E_q - The timestamp a *BIP* is committed.

E_t - The timestamp in the Ethereum block containing the accepted `sunrise()` function call for t .

E_t^{\min} - The minimum timestamp Beanstalk accepts a `sunrise()` function call for t .

E_t^{first} - The difference between the Ethereum timestamp of the first *Sow* in t such that there is at most one *Soil*.

E_ϕ - The timestamp of the last interaction with the BEAN:ETH Uniswap v2 liquidity pool.

E_Ψ - The timestamp of last *Unpause*.

ζ^Φ - A flash-loan-resistant price invariant for the BEAN:3CRV Curve liquidity pool.

ζ^Ω - A flash-loan-resistant price invariant for the LUSD:3CRV Curve liquidity pool.

Farmers Market - A Beanstalk-native decentralized *Pod* exchange.

Field - The Beanstalk lending facility.

FIFO - First in, first out.

Fill - Match a *Pod Listing* with an overlapping *Pod Order*.

Frozen - Not able to move.

$g^\alpha(z^\alpha)$ - A function to calculate the BDV for a given number of α .

$g^\phi(z^\phi)$ - A function to calculate the BDV for a given number of ϕ .

$g^\lambda(z^\lambda)$ - A function to calculate the BDV for a given number of λ .

$g^\phi(z^\phi)$ - A function to calculate the BDV for a given number of ϕ .

$g^\Phi(z^\Phi)$ - A function to calculate the BDV for a given number of Φ .

$g^{3\text{CRV}}(z^{3\text{CRV}})$ - A function to calculate the BDV for a given number of 3CRV.

h_t - The number of Pods that ripen and become *Harvestable* at the beginning of each *Season*.

Harvest - Redeem ripened *Pods*.

Harvestable Pods - Redeemable *Pods*.

i - The *Season* of *Deposit*.

Ideal Equilibrium - A state where the Bean price and Beanstalk debt level are both stable at their optimal levels.

k^α - The number of *Stalk* per BDV of α *Deposited*.

k^ϕ - The number of *Stalk* per BDV of ϕ *Deposited*.

k^λ - The number of *Stalk* per BDV of λ *Deposited*.

k^ϕ - The number of *Stalk* per BDV of ϕ *Deposited*.

k^Φ - The number of *Stalk* per BDV of Φ *Deposited*.

K^{\min} - The minimum percentage ownership of total outstanding *Stalk* required to submit a *BIP*.

K_t - A *Silo Member's* total *Stalk* during t .

K_t^λ - The *Stalk* during t for a given Z_i^λ of a *Silo Member* that last updated their *Silo* in t_f .

Listing - An offer to buy or sell on the *Farmers Market*.

l - The BDV of a *Deposit* at the time of *Deposit*.
 λ - Bean and other whitelisted assets.
 Λ - The *Silo Whitelist*.
 M - The total Beans minted over all *Seasons*.
 m_t - The Beans minted at the beginning of t .
 μ - The total *Burnt Beans* over all *Seasons*.
 n_{t-1} - The number of Y in the $X:Y$ liquidity pool at the end of the previous *Season*.
 ξ - The number of full *Seasons* assets are *Frozen* after *Withdrawal* from the *Silo*; the number of consecutive *Seasons* of *Rain* necessary to trigger a *Season of Plenty*.
Optimal State - The optimal current state of Beanstalk.
Pause - Temporarily prevent the `sunrise()` function call from being accepted.
Plot - *Pods* that grow from Beans that were *Sown* in the same transaction.
Pod - The Beanstalk debt asset, redeemable for $\emptyset 1$ when ripened.
Pod Line - The order of *Pods* that will become *Harvestable* based on the FIFO *Harvest* schedule.
Pod Listing - An offer to sell a whole or partial *Plot* on the *Farmers Market*.
Pod Order - An Order to buy a *Pods* on the *Farmers Market*.
Pod Rate - The Beanstalk debt level relative to the Bean supply.
 P^α - The α virtual price.
 P^Φ - The Φ virtual price.
 P^Ω - The Ω virtual price.
 P^{3CRV} - The 3CRV virtual price.
 \bar{P} - The Beanstalk oracle price of $\emptyset 1$.
 $\bar{P}^{\emptyset:Y}$ - The TWAP of the $\emptyset:Y$ liquidity pool.
 $\bar{P}^{X:Y}$ - The TWAP of the $X:Y$ liquidity pool.
 \bar{P}_t - The TWAP of $\emptyset 1$ over the current *Season*.
 $\bar{P}_{t-1}^{\emptyset:Y}$ - The TWAP of the $\emptyset:Y$ liquidity pool over the previous *Season*.
 $\bar{P}_{t-1}^{X:Y}$ - The TWAP of the $X:Y$ liquidity pool over the previous *Season*.
Rain - It is *Raining* if $\bar{P}_{t-1} > 1$ and $R^D < R^{D*}$.
 R^D - The *Pod Rate*.
 $R^{D^{lower}}$ - The R^D level below which debt is considered excessively low.
 $R^{D^{upper}}$ - The R^D level above which debt is considered excessively high.
 R^{D*} - The optimal R^D level.
 S - The *Soil* supply.
Season - A unit of time.
Seeds - An ERC-20 Standard token that grows one *Stalk* each *Season*.

Silo - The Beanstalk DAO.

Silo Member - A *Stalk* owner.

Stalk - The ERC-20 Standard Beanstalk governance token.

Stalk System - A set of *Stalk* policies.

Soil - The current number of Beans that can be *Sown* in exchange for *Pods*.

Soil Rate - The portion of the total Bean supply Beanstalk is currently willing to remove in exchange for debt.

Sow - Lend.

s_t - The *Soil* minted at the beginning of t .

S_t^{\min} - The *Minimum Soil* at the beginning of t .

S_t^{start} - The *Soil* supply at the beginning of t .

S_t^{end} - The *Soil* supply at the end of the *Season*.

t - A *Season*.

TWAP - Time weighted average price.

t' - The *Season* of the last *Unpause*.

t_f - The *Season* a *Silo Member* last interacted with the *Silo*.

u - *Sown* \emptyset .

U - The total *Sown* \emptyset over all *Seasons*.

Unharvestable - Not redeemable.

Unpause - Resume the acceptance of `sunrise()` function calls.

USD - US Dollars.

USDC - US Dollar Coins.

ϕ - LP tokens for the \emptyset :Y Uniswap v2 liquidity pool.

Φ - LP tokens for the BEAN:3CRV Curve liquidity pool.

Φ^A - The A parameter of the BEAN:3CRV Curve liquidity pool.

ϕ^{Silo} - The ϕ in the *Silo* as a percent of total ϕ .

$\bar{\phi}_t^\emptyset$ - The time weighted average number of Beans in the BEAN:ETH Uniswap v2 liquidity pool from the start of the current *Season* to the current block.

ϕ_Ξ - The total number of ϕ in the current block.

ϕ_Ξ^\emptyset - The number of Beans in the BEAN:ETH Uniswap v2 liquidity pool in the current block.

$\Phi_{\Xi-1}$ - A flash-loan-resistant total number of Φ .

$\Phi_{\Xi-1}^\emptyset$ - The number of Beans in the BEAN:3CRV Curve liquidity pool in the last block.

$\Phi_{\Xi-1}^{3\text{CRV}}$ - The number of 3CRV in the BEAN:3CRV Curve liquidity pool in the last block.

V - The value peg.

Voting Period - The time interval a *BIP* is considered.

w - The percentage of additional Beans ultimately *Harvested* from 1 Sown \emptyset .
Withdrawal - An asset removed from the *Silo*.
 X - An existing ERC-20 Standard first generation stablecoin that pegs to V .
 $X:Y$ - An existing Uniswap v2 liquidity pool of X and Y .
 x_{t-1} - The number of X in the $X:Y$ liquidity pool at the end of the previous *Season*.
 Y - A decentralized ERC-20 Standard token.
 y_{t-1} - The number of Y in the $\emptyset:Y$ liquidity pool at the end of the previous *Season*.
 z^λ - The number of λ in a *Deposit*.
 Z_i^λ - A *Silo Member's* set of λ *Deposits* during *Season i*.
 Ω - LP tokens for the LUSD:3CRV Curve liquidity pool.
 Ω^A - The A parameter of the LUSD:3CRV Curve liquidity pool.
 $\Omega_{\Xi-1}$ - A flash-loan-resistant total number of Ω .
 $\Omega_{\Xi-1}^{\text{LUSD}}$ - The number of LUSD in the LUSD:3CRV Curve liquidity pool in the last block.
 $\Omega_{\Xi-1}^{\text{3CRV}}$ - The number of 3CRV in the LUSD:3CRV Curve liquidity pool in the last block.

12.6 Whitepaper Version History

The following is a complete version history of the whitepaper:

- 1.0.0 (August 6, 2021)
 - Original whitepaper.
- 1.0.1 (August 10, 2021) [Code Version 1.0.1 should have been 1.0.0.]
 - Updated Section 5 to reflect that the first *Season* began when the `init()` function was called as part of the Beanstalk deployment.
 - Updated Section 6.4.3 to reflect that the first *Season* began when the `init()` function was called as part of the Beanstalk deployment, and state that $\bar{P} = 1$ for each *Season* that contains a *Pause*.
 - Moved a paragraph from Section 6.4.3 to 6.4.4 for better flow.
 - Updated the definition of a^q in Section 6.4.5 to reflect the correct base commit award. [a^q was defined correctly in version 1.0.0 but defined incorrectly in versions 1.0.1 - 1.1.2.]
 - Updated Section 9.1 to reflect that the first *Season* began when the `init()` function was called as part of the Beanstalk deployment.
- 1.1.0 (August 26, 2021)
 - Updated Section 6.3 to reflect the new *Stalk* equations, as amended by BIP-0.
 - Added t_f to the Glossary.
- 1.1.1 (September 15, 2021)
 - Added `bean.money` URL to the cover page.
- 1.1.2 (September 23, 2021)
 - Updated citation 16 with the correct URL for BIP-0.
- 1.1.3 (October 15, 2021) [Whitepaper Version 1.1.3 should have been 1.2.0. Code Version 1.1.2 should have been 1.2.0.]
 - Updated the definition of a^q in Section 6.4.5 to reflect the correct base commit award. [a^q was defined correctly in version 1.0.0 but defined incorrectly in versions 1.0.1 - 1.1.2.]
- 1.3.0 (November 11, 2021)
 - Updated Section 8.4.8 to reflect the latest *Weather* changes, as amended by BIP-2²⁵.
 - Updated Section 11 to reflect an updated understanding of potential uses of Beanstalk.
 - Created an Appendix and moved Section 12 and Section 13 to the Appendix as Sections 12.1 and 12.2, respectively.
 - Updated Section 12.1 to reflect an updated understanding of potential uses of Beanstalk.
 - Added Section 12.3, a Whitepaper Version History, to the Appendix.

²⁵ github.com/BeanstalkFarms/Beanstalk/blob/bip-2/bips/bip-2.md

- 1.3.1 (December 3, 2021)
 - Removed a sentence from the second paragraph of Section 6.2 to reflect the new *Stalk* equations, as amended by Pause Patch-0.
 - Updated Section 6.3 to reflect the new *Stalk* equations, as amended by Pause Patch-0.
 - Added a comma in the second paragraph of Section 8.3 for clarity.
 - Added f^ϕ to the Glossary.
 - Italicized *Stalk* in Whitepaper Version History changes for version 1.1.0.
- 1.4.0 (December 10, 2021)
 - Modified the formatting of two equations and the language of the fifth paragraph in Section 6.3 for clarity.
 - Changed variables b_h , h and Λ_h to b_Ω , Ω and Λ_Ω , respectively, in Section 6.3 and the Glossary.
 - Updated Sections 7.1, 8, 8.1, 8.2, 8.3 and 8.4.5 to reflect the new *Soil* mechanism, as amended by BIP-6.
 - Added h_t to the Glossary.
 - Corrected a typo in the change history for whitepaper version 1.3.1 in Section 12.3.
- 1.5.0 (December 18, 2021)
 - Modified the language of the seventh paragraph in Section 3 for clarity.
 - Switched all $>$ to $<$ for consistency and clarity.
 - Updated Sections 6.2, 6.3 and 9.6, and Figure 1, to reflect the new *Convert* mechanism, as amended by BIP-7.
 - Updated Figure 2 to mirror the new design of Figure 1.
 - Modified the language of the second paragraph in Section 11 for consistency.
- 1.6.0 (January 12, 2022)
 - Modified the last sentence of the Abstract for better flow.
 - Changed a semicolon to a colon in the fourth paragraph of Section 1 for clarity.
 - Corrected a typo in the second paragraph of Section 3.
 - Updated the fourth and fifth paragraphs of Section 3 to reflect an updated understanding of potential uses of Beanstalk.
 - Modified the language of the fifth paragraph of Section 4 for consistency.
 - Modified the language of the first paragraph of Section 6.1 for clarity.
 - Updated the first paragraph of Section 6.2 to reflect the new *Withdrawal Freeze*, as amended by BIP-9.
 - Modified the language of the second paragraph of Section 6.2 for clarity.
 - Modified the language of the first, third and twelfth paragraphs of Section 6.3 for clarity.
 - Modified the equation for K_t for consistency.
 - Modified the language of the first paragraph of Section 6.4 for clarity.
 - Updated Section 6.4.1 to reflect the new governance policy, as amended by BIP-9.
 - Corrected a typo in the third paragraph of Section 6.4.2.
 - Changed variable E_f to E_Ψ in Section 6.4.3 and the Glossary.
 - Corrected typos in the first paragraph of Section 6.4.4 and the fourth paragraph of Section 6.4.5.

- Modified the language of the third paragraph of Section 6.4.5 for clarity.
 - Modified the language of the first paragraph of Section 7 for consistency.
 - Updated the second paragraph of Section 7.2 to reflect the new *Soil* policy, as amended by BIP-9.
 - Updated Section 8.2 to reflect the new Bean supply policy, as amended by BIP-9.
 - Corrected a typo and modified the language for clarity in the penultimate paragraph of Section 8.2.
 - Modified the last equation in Section 8.2 for consistency.
 - Updated Section 8.3 to reflect the new *Soil* supply policy, as amended by BIP-9.
 - Modified the language of the second paragraph of Section 8.3 for clarity.
 - Updated the equation for S_t^{start} in Section 8.3 to reflect the new *Soil* supply policy, as amended by BIP-9.
 - Corrected a typo in the first paragraph of Section 8.4.1.
 - Modified the language of the second paragraph of Section 8.4.3 for clarity.
 - Modified the language of the first and second paragraphs of Section 8.4.4 for clarity.
 - Updated Section 8.4.5 to reflect the new *Soil* supply policy, as amended by BIP-9.
 - Modified the language of the first paragraph of Section 8.4.7 for clarity.
 - Corrected a typo, and modified the language to reflect the new *Season of Plenty* timer, as amended by BIP-9, in the second paragraph of Section 8.2.
 - Modified the language of the third paragraph of Section 9.1 for clarity.
 - Modified the section titles of Sections 9.1, 9.2 and 9.4 for consistency.
 - Modified the language of the second and third paragraphs of Section 9.4 for clarity.
 - Modified the language of the first and second paragraphs of Section 9.6 for clarity.
 - Modified the language of the third and fourth paragraphs of Section 9.6 to reflect current incentive structures.
 - Corrected a typo in the second paragraph of Section 10.
 - Modified the language of the fourth paragraph of Section 10 for accuracy.
 - Updated the fifth paragraph of Section 11 to reflect an updated understanding of potential uses of Beanstalk.
 - Modified the section title, and language of the first paragraph, of Section 12.1 to clarify the listed parameters are current.
 - Modified the conventions in Section 12.2 to reflect consistency with regard to Latin letters only.
 - Added K^{\min} , Λ^{Silo} , and ξ to the Glossary.
 - Changed S_{t-1}^{end} to S_t^{end} in the Glossary for consistency.
 - Removed B_t , S_t^{\max} , and R_S^{\max} from the Glossary.
 - Modified the language in the change histories for versions 1.0.1, 1.1.0, 1.1.3, 1.3.1 in Section 12.3 for consistency.
- 1.7.0 (February 5, 2022)
 - Added a new Section 12.2 to describe the *Farmers Market* to the Appendix.
 - Changed *Deposit* in the Glossary for clarity.
 - Moved *Optimal State* in the Glossary to reflect correct alphabetical ordering.
 - Added *Cancel*, *Farmers Market*, *Fill*, *Listing*, *Plot*, *Pod Line*, *Pod Listing*, and *Withdrawal* to the Glossary.

- 1.8.0 (March 10, 2022)
 - Changed the fourth paragraph of Section 4 to reflect the update to the *Silo*, as amended by BIP-12.
 - Changed Section 6 to reflect the update to the *Silo*, as amended by BIP-12.
 - Changed the third paragraph of Section 11 to reflect additional potential changes to the *Silo*.
 - Added c^λ , c_t^λ , $g^\lambda(z^\lambda)$, k^λ , K_t^λ , l , λ , Λ , z^λ and Z_i^λ to the Glossary.
 - Changed G to μ , Λ to ϕ and Λ^{Silo} to ϕ^{Silo} in the Glossary.
 - Removed b_Ω , c_t^ϕ , c_t^Λ , k_t^ϕ , k_t^Λ , l_i^Λ , λ^ϕ , λ^Λ , Λ_Ω , z_i^ϕ , z_i^Λ , $z_i^{\Lambda:\phi}$ and Ω from the Glossary.
- 1.9.0 (March 11, 2022)
 - Updated Figure 11 and Figure 12 to reflect the new *Weather* changes, as amended by BIP-13.
 - Corrected a typo in the change history for whitepaper version 1.3.0 in Section 12.3.
- 1.9.1 (March 16, 2022)
 - Corrected Section 8.4.8 to reflect the new *Weather* changes, as amended by BIP-13.
 - Updated Whitepaper Version History links for versions 1.6.0, 1.7.0, and 1.8.0.
- 1.9.2 (April 1, 2022)
 - Corrected a typo in the first paragraph of Section 6.2.
 - Updated the second paragraph of Section 6.2 to reflect the flash-loan-resistant nature of Bean-denominated-value.
 - Corrected the formatting of a^{BIP} and A^{BIP} .
 - Corrected Section 6.5.5 to reflect the correct rate and duration that a^q compounds.
 - Updated the equation for B in Section 8.4.5 to include B^{BIP} .
 - Corrected Section 8.4.8 to reflect the *Weather* changes when R^D equals $R^{D^{\text{lower}}}$, R^{D^*} or $R^{D^{\text{upper}}}$.
 - Added a new Section 12.2 to describe the *Silo Whitelist* to the Appendix.
 - Added a new Section 12.4 to describe *Fundraisers* to the Appendix.
 - Added B^{BIP} , BDV , c^ϕ , c^ϕ , c^Φ , E_Ξ , E_ϕ , E_Ψ , ζ^Φ , $g^\phi(z^\phi)$, $g^\phi(z^\phi)$, $g^\Phi(z^\Phi)$, $g^{3\text{CRV}}(z^{3\text{CRV}})$, k^ϕ , k^ϕ , k^Φ , P^Φ , $P^{3\text{CRV}}$, Φ , $\bar{\phi}_t^\phi$, ϕ_Ξ , ϕ_Ξ^ϕ , $\Phi_{\Xi-1}$, $\Phi_{\Xi-1}^\phi$ and $\Phi_{\Xi-1}^{3\text{CRV}}$ to the Glossary.
 - Corrected two typos in the Glossary.
- 1.9.3 (April 3, 2022)
 - Corrected typos in the eleventh paragraph of Section 8.4.5, Section 12.2, third paragraph of Section 12.4, Glossary and Whitepaper Version History changes for version 1.1.0.
- 1.15.0 (April 7, 2022)
 - Moved to a new whitepaper versioning system such that whitepaper versions line up with *BIPs*.
 - Moved the definition of B to Section 8.4.1 for consistency and clarity.
 - Updated Section 8.4.5 to reflect the new method to measure demand for *Soil*, as amended by BIP-15.
 - Added $\Delta E_t^{u^{\text{first}}}$ and $E_t^{u^{\text{first}}}$ to the Glossary.
 - Changed the definition of ΔE_t^u in the Glossary.

- Removed $\Delta E_t^{u\text{last}}$, ΔR_{t-1}^S , $\frac{\partial R^S}{\partial t}$, $\frac{\partial R^S}{\partial t}^{\text{upper}}$, $E_{t-1}^{u\text{first}}$, R^S , $R^{S\text{min}}$, $R_t^{S\text{end}}$ and $R_t^{S\text{start}}$ from the Glossary.
- Added a comma for clarity in 18 instances in the Whitepaper Version History.
- 1.16.0 (April 11, 2022)
 - Modified Sections 12.2.2 and 12.2.3 for consistency.
 - Added a Section 12.2.4 to reflect the addition of α to the *Silo Whitelist*, as amended by BIP-16.
 - Added \mathcal{S}^{Φ} , $\mathcal{S}^{\text{LUSD}(\Omega)}$, α , c^α , ζ^Ω , $g^\alpha(z^\alpha)$, k^α , P^α , P^Ω , Φ^A , Ω , Ω^A , $\Omega_{\Xi-1}$, $\Omega_{\Xi-1}^{\text{LUSD}}$ and $\Omega_{\Xi-1}^{3\text{CRV}}$ to the Glossary.
 - Added the word “liquidity” for clarity in 6 instances in the Glossary.
 - Added the word “v2” for clarity in 3 instances in the Glossary.
 - Added the word “Curve” for clarity in 3 instances in the Glossary.
 - Moved the ordering of P^Φ and $P^{3\text{CRV}}$ in the Glossary for consistency.